



GT50/50/0005

**ROAD TRAFFIC REGULATION ACT 1984 – SECTIONS 64 AND 65
AUTHORISATION OF TRAFFIC SIGNS AND SPECIAL DIRECTIONS**

The Secretary of State for Transport, in exercise of his powers under Sections 64 and 65 of the Road Traffic Regulation Act 1984, and of all other powers enabling him in that behalf, on roads for which Hampshire County Council is the traffic authority, hereby:-

1. authorises the erection, at appropriate sites on the said roads, of a traffic sign (hereinafter referred to as “the authorised sign”) conforming as to size, colour and character with the sign shown in the attached set of drawings numbered GT50/50/0005-1 save that the element incorporating the sign to diagram 610, as shown in the said set of drawings, may be varied to incorporate a sign to diagram 606, 611 or 616 in Schedule 2 or diagram 951, 955, 956 or 957 in Schedule 5 to the Traffic Signs Regulations 2002 (Part I of SI 2002/3113, “the 2002 Regulations”); and
2. directs, without prejudice to any statutory provision to the like effect, that it is a condition of this authorisation that the erection of the authorised sign at or near the said sites shall continue to have effect only until such day as may be appointed by one month's notice given by the Secretary of State in writing to the traffic authority for the removal or alteration of the authorised sign and on that day the said authorisation shall, without prejudice to the giving of any further authorisation or direction, cease to have effect.




GT50/50/0005

The provisions of Regulations 12, 18 and 19 of the 2002 Regulations shall apply to the roundel incorporated in the authorised sign in the same manner as they apply to the same sign shown in diagrams 606, 611 or 616 in Schedule 2 or diagrams 951, 955, 956 or 957 in Schedule 5 to those Regulations.


This authorisation replaces the earlier one dated 25th May 2007 under reference GT46/45/148 which is hereby revoked.

Dated... 3 June 2011


Signed by authority of the Secretary of State



A Delegated Official of the Department for Transport

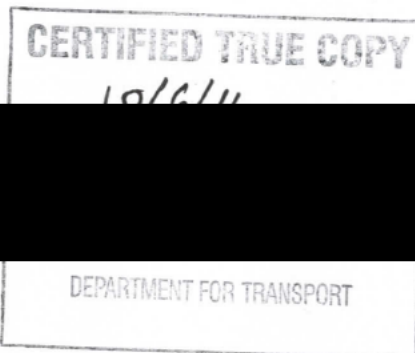

— Retroreflective Bollard with Internal illumination —
from a Baselight

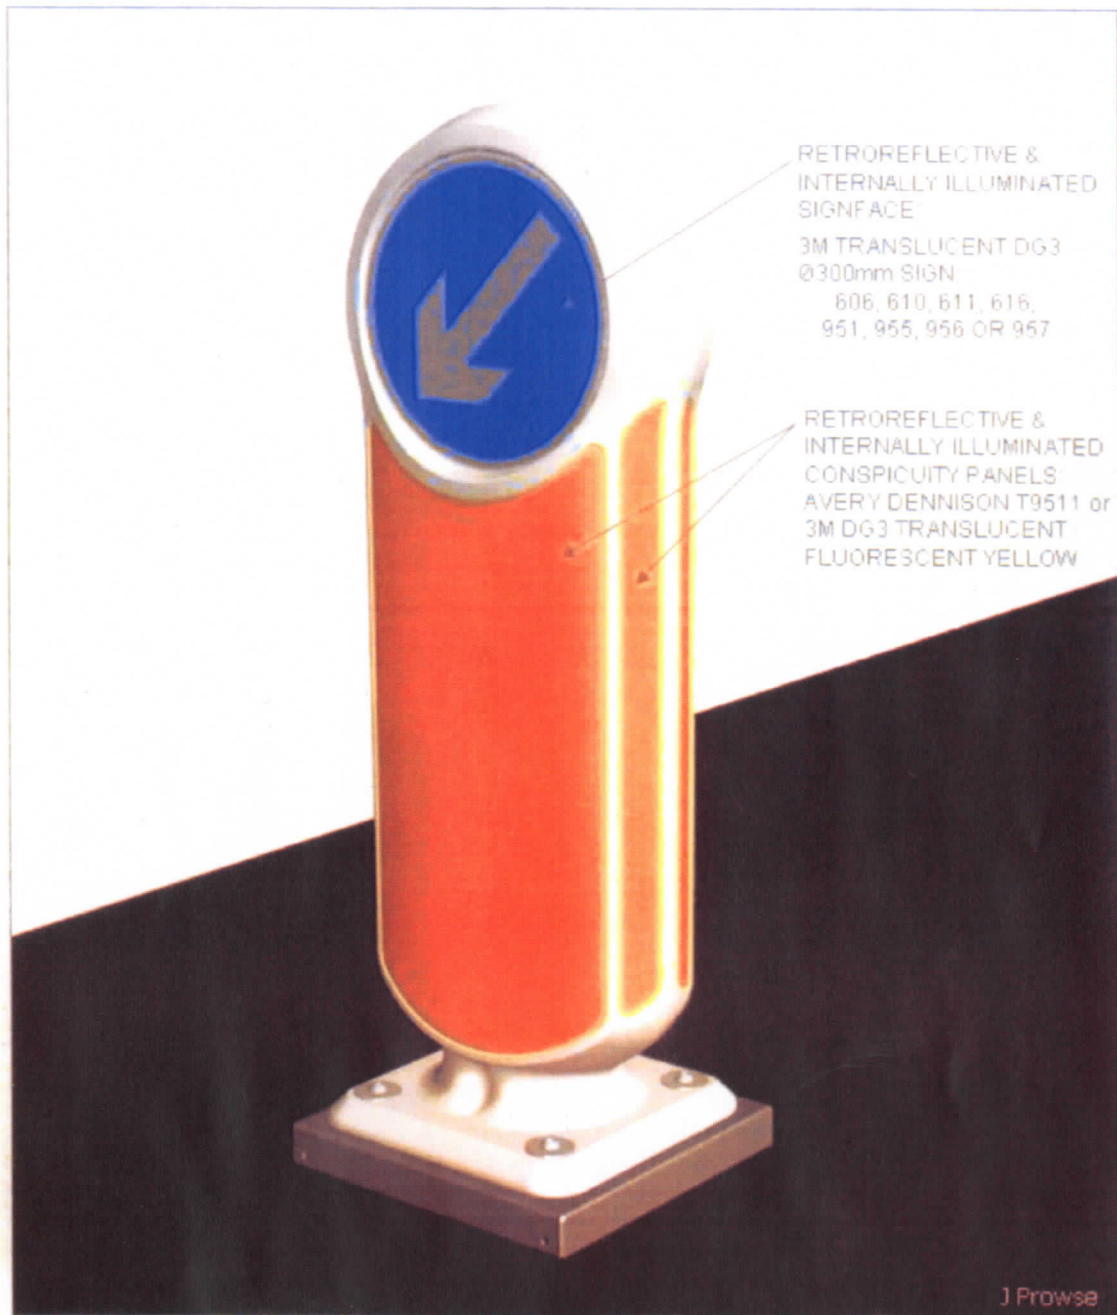


Department for Transport
2/6/11
9750/50/0005-1

Page 1 of 7


MODEL SPECIFICATION

REBOUND SIGNMASTER™ BOLLARD

(RETROREFLECTIVE BOLLARD WITH INTERNAL ILLUMINATION FROM A BASELIGHT)

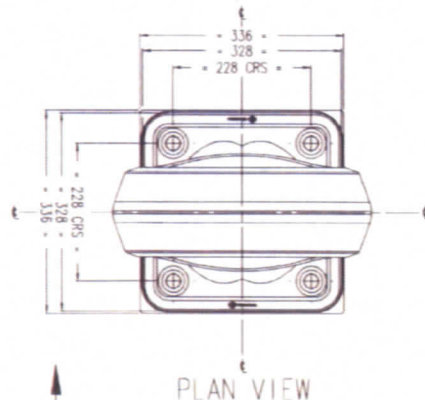

PLAN VIEW

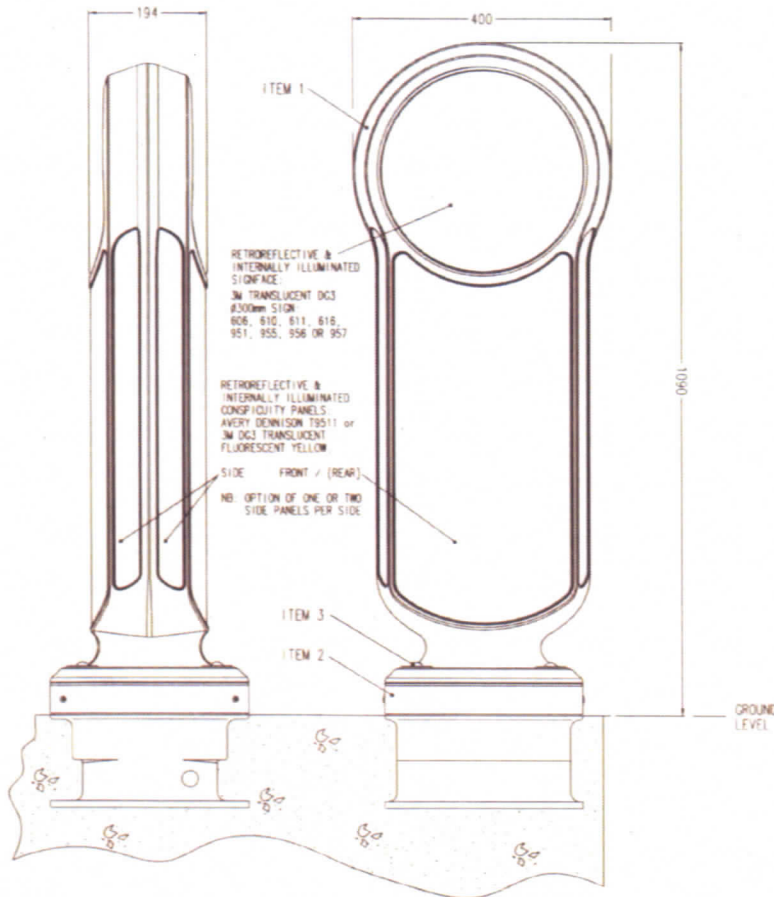

SIDE VIEW

FRONT VIEW

(SHOWING PRE-INSTALLED TYPICAL LIGHTBOX - INSTALLED ONTO OPTIONAL LIGHTBOX ADAPTER PLATE)

PRODUCT INFORMATION:

- **WEIGHT** - BOLLARD - 6.0 Kg
- FIXINGS - 1.0 Kg
- ADAPTOR PLATE - 3.1 Kg
- TOTAL - 10.1 Kg
- **MATERIAL** - BOLLARD - IMPACTPOL®
- ADAPTOR - MS GALVANISED
- FIXINGS - SCREWS - STAINLESS STEEL
- WASHERS - STAINLESS STEEL
- SPACERS - RIGID PVC

- **BODY** - WHITE

- **DIMENSIONS** - ALL DIMENSIONS IN MM UNLESS OTHERWISE STATED.

INSTALLATION GUIDE:

- **ITEM 1** - REMOVABLE BOLLARD
- **ITEM 2** - ADAPTOR PLATE (VARIOUS TYPES DEPENDANT ON LIGHTBOX FITTING)
- **ITEM 3** - FIXINGS (4 OFF):
- M10 x 50mm SOCKET HEAD SCREW - S/S
- M10 x Ø50 x 3mm WASHER - POWDER COATED S/S
- M10 x Ø19 x 28mm SPACER - RIGID PVC

- **ENSURE THAT ANY SIGNFACE FACES TOWARDS ONCOMING TRAFFIC.**

- **FIXING TO EXISTING BASELIGHTS:**

USE THE APPROPRIATE ADAPTER PLATE RELATIVE TO THE TYPE OF BASELIGHT. FOLLOW THE SEPARATE FIXING INSTRUCTIONS SUPPLIED.

- **USE OF LED BASELIGHT:**

FOLLOW THE SEPARATE FIXING INSTRUCTIONS SUPPLIED.

OPTIONAL PARTS:

- **OPTIONS AVAILABLE FOR THE PRODUCT:**
- BODY C/W FRONT, 1xLH & 1xRH CONSPIQUITY PANELS
- BODY C/W FRONT, 2xLH & 2xRH CONSPIQUITY PANELS
- BODY C/W FRONT, REAR, 2xLH & 2xRH CONSPIQUITY PANELS
- + A RANGE OF AUTHORISED SIGNFACES &/OR WHITE DISC

- **SPARES ARE AVAILABLE, WHICH INCLUDE:**

- BOLLARD C/W FIXINGS & RETROREFLECTIVE PATCHES
- BOLLARD ONLY
- RANGE OF SIGNFACES
- FIXINGS

TECHNICAL DATA:

- **SURFACE AREA OF CONSPIQUITY PANELS:**


- FRONT = 161,701mm² (PROJECTED)
- SINGLE SIDE = 24,255mm²
- OPTIONAL DOUBLE SIDE = 48,510mm²

- **SURFACE AREA OF SIGNFACE = 70,686mm²**

ORG. TITLE		 Glasdon UK Limited Preston New Road, Blackpool Lancashire, FY4 4JL Telephone: 01253 800400 Facsimile: 01253 782508 E-mail: sales@glasdon-uk.co.uk Web Site: www.glasdon.com
PROJECT		
ORG. No.	PROJECT No.	
SCALE	DATE	
DRAWN BY	CHECKED	

SPECIFICATION NUMBER - 025066-SQS ISSUE 2
© GLASDON UK LTD 02/07/07 SHEET SIZE: A2


TECHNICAL
PROJECTED AREA OF FRONT = 230,362mm²
PROJECTED AREA OF EACH SIDE = 23,250mm²
LEDs = 2 off Cree High Power LED's Guarantee of 50,000 hours burn time.
Batteries = Cyclon Non-spillable Lead-Acid Batteries Guaranteed for 5 Years with a Design Life of 7 to 10 Years
Solar Panels = 3 Panels of Monocrystalline technology Guaranteed for 5 Years
Ballard Body = Rotationally moulded made out of recyclable material.

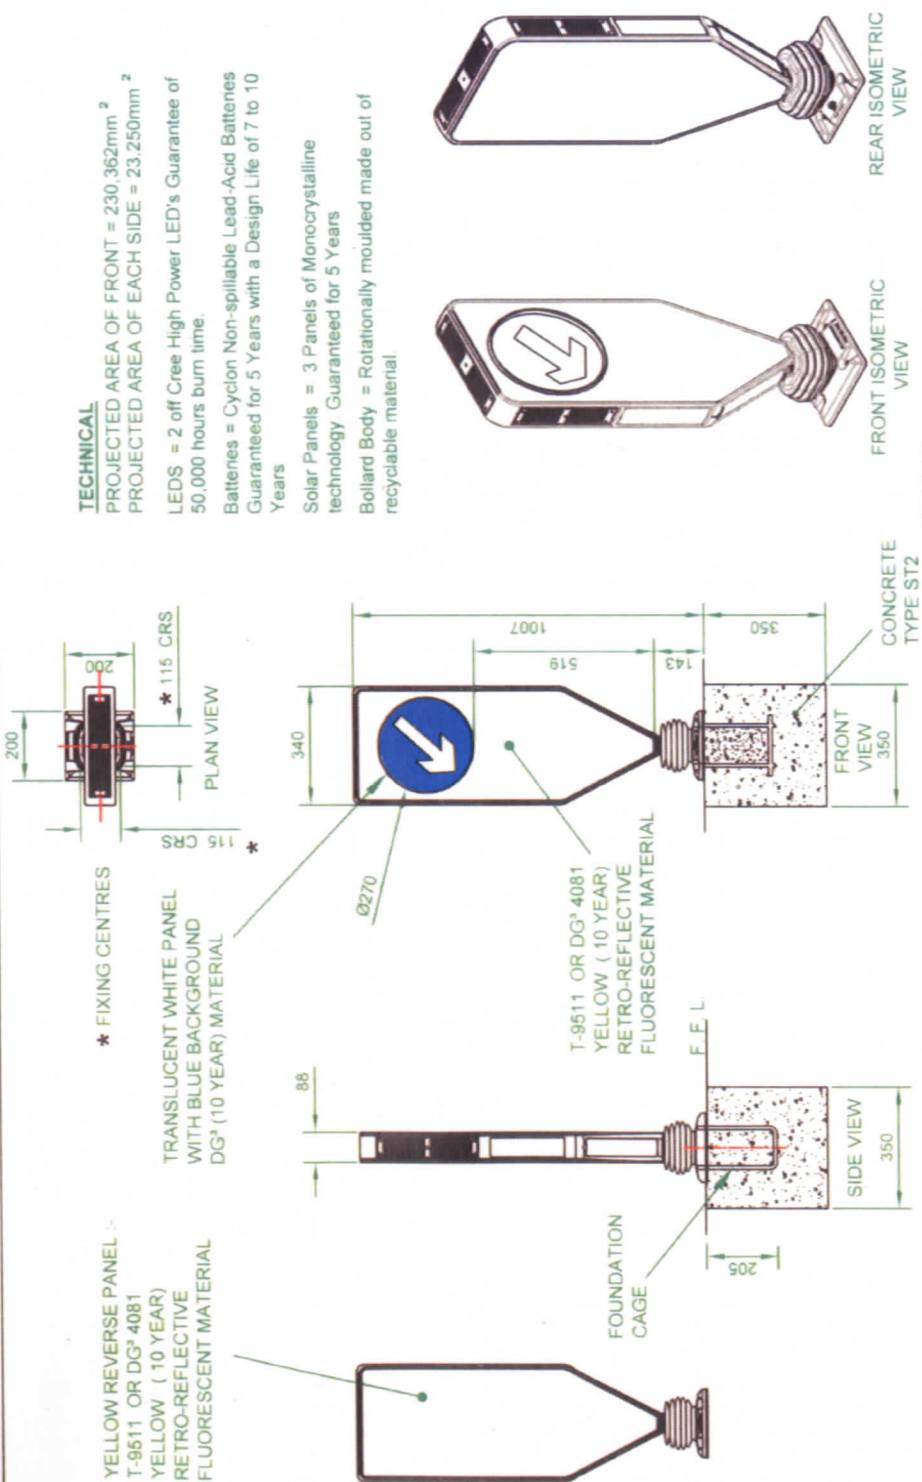


PLEASE NOTE: SIGNATURE RESERVES THE RIGHT TO UPDATE THE ABOVE AS AND WHEN NECESSARY WITHOUT PRIOR NOTICE

NOTE UNDERSIDE OF PLATE IS GROUND LEVEL.

TOLERANCE	MATERIAL	DRN BY	CHKD BY	APPROVED BY & DATE	FILENAME	DATE	SCALE
+/- 0.5mm	-	K. RAM	N/A		L6132B	12-01-11	N.T.S.
ANGULAR TOLERANCE	SPECIFICATION	OWNER SIGNA	TITLE LAYOUT - LED SOLAR ILLUMINATED TRUEFLEX BOLLARD WITH FOUNDATION CAGE SPECIFICATION				
± 1°	-	 SIGNATURE HOUSE HAINGE ROAD TWIDALE, OLDDBURY B69 2NF 0121 557 0234	DWG. No.		REVISION		
ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE STATED.	FINISH		L6132		B		
			6		8		

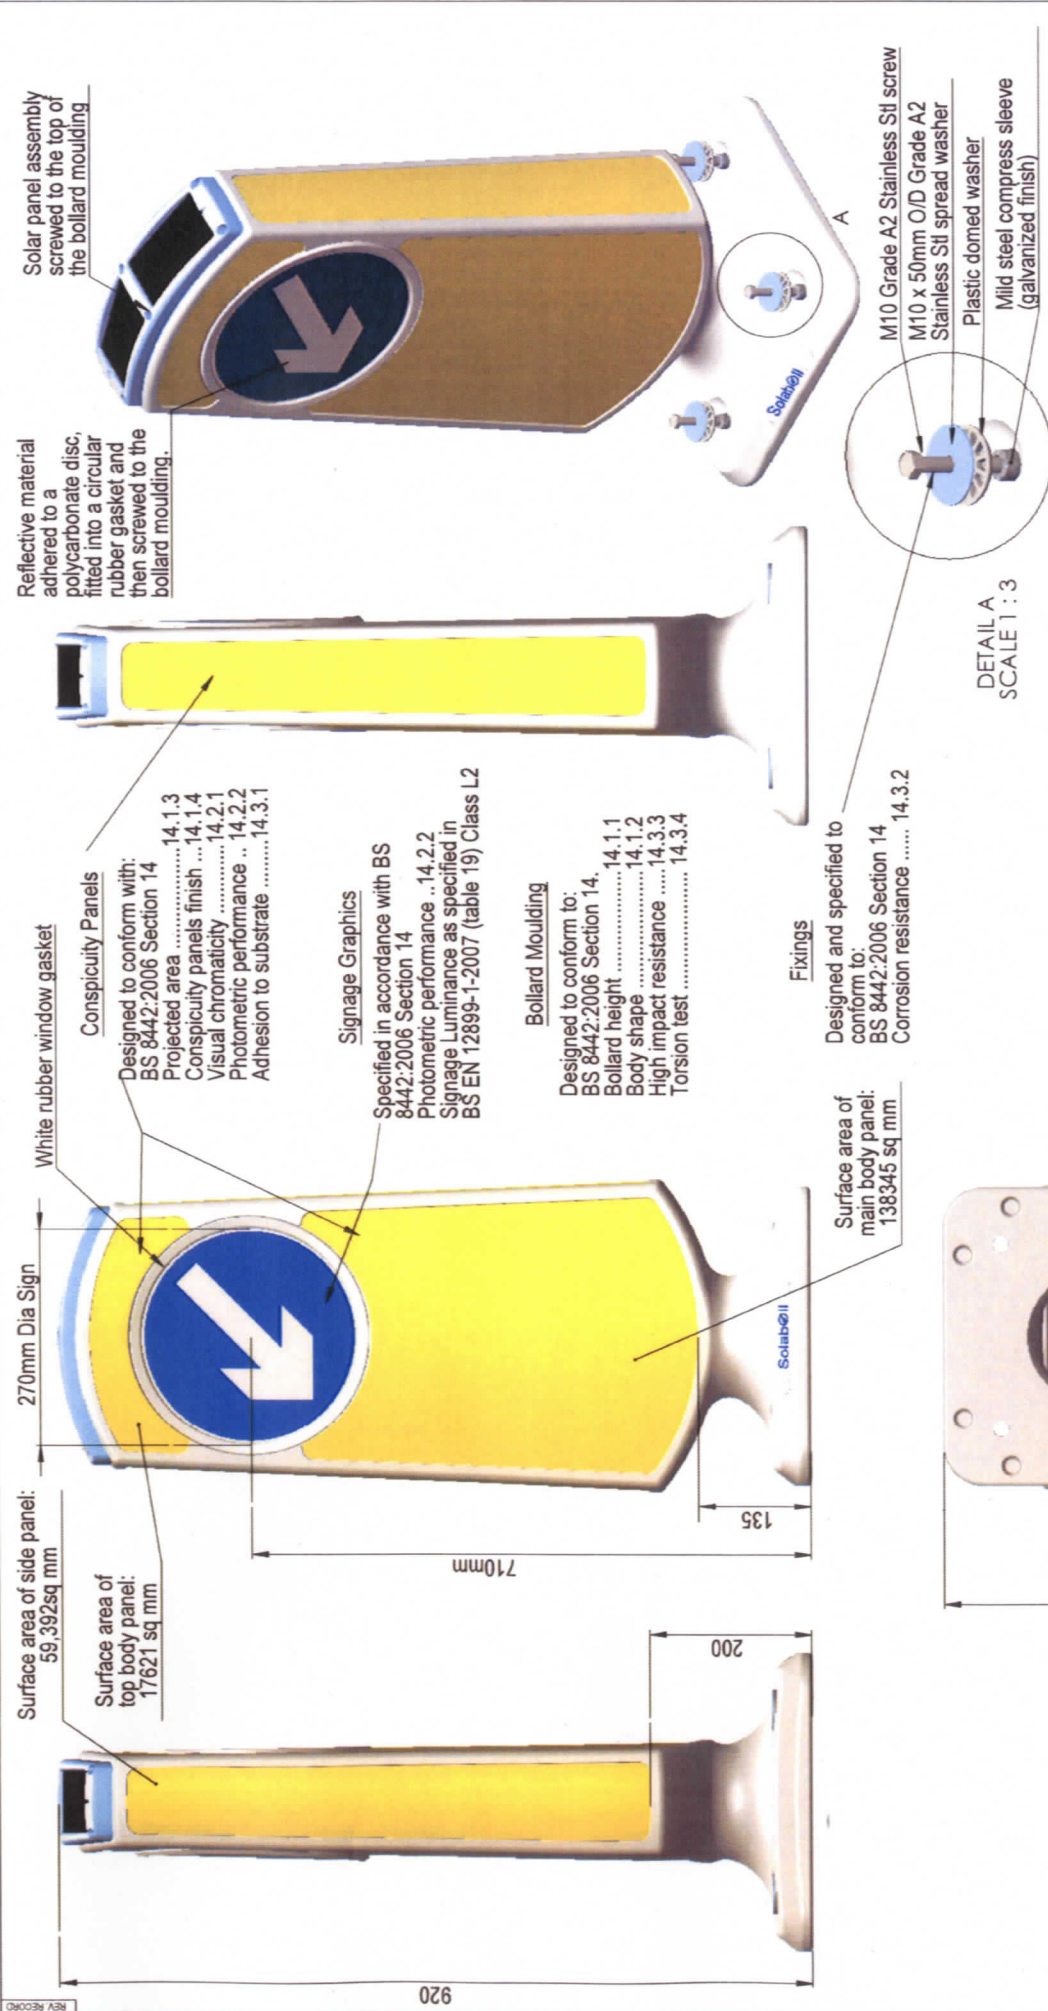

© 2009 PUDSEY DIAMOND LTD. ALL RIGHTS RESERVED. THIS DOCUMENT OR ANY PART THEREOF MAY NOT BE REPRODUCED STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY WAY WITHOUT WRITTEN PERMISSION FROM PUDSEY DIAMOND ENGINEERING LIMITED.			
NOTES:	TOLERANCES UNLESS OTHERWISE STATED		
	All dimensions in mm Remove all burrs and sharp edges FINISH:		
MATERIAL:	0.00 = +0.15		
	0.0 = +0.30		
SPEC:	Whole No's +0.50		
Drawn By	Checked By	Date Drawn	Scale
BD	BD	25/11/10	
			THIRD ANGLE PROJECTION

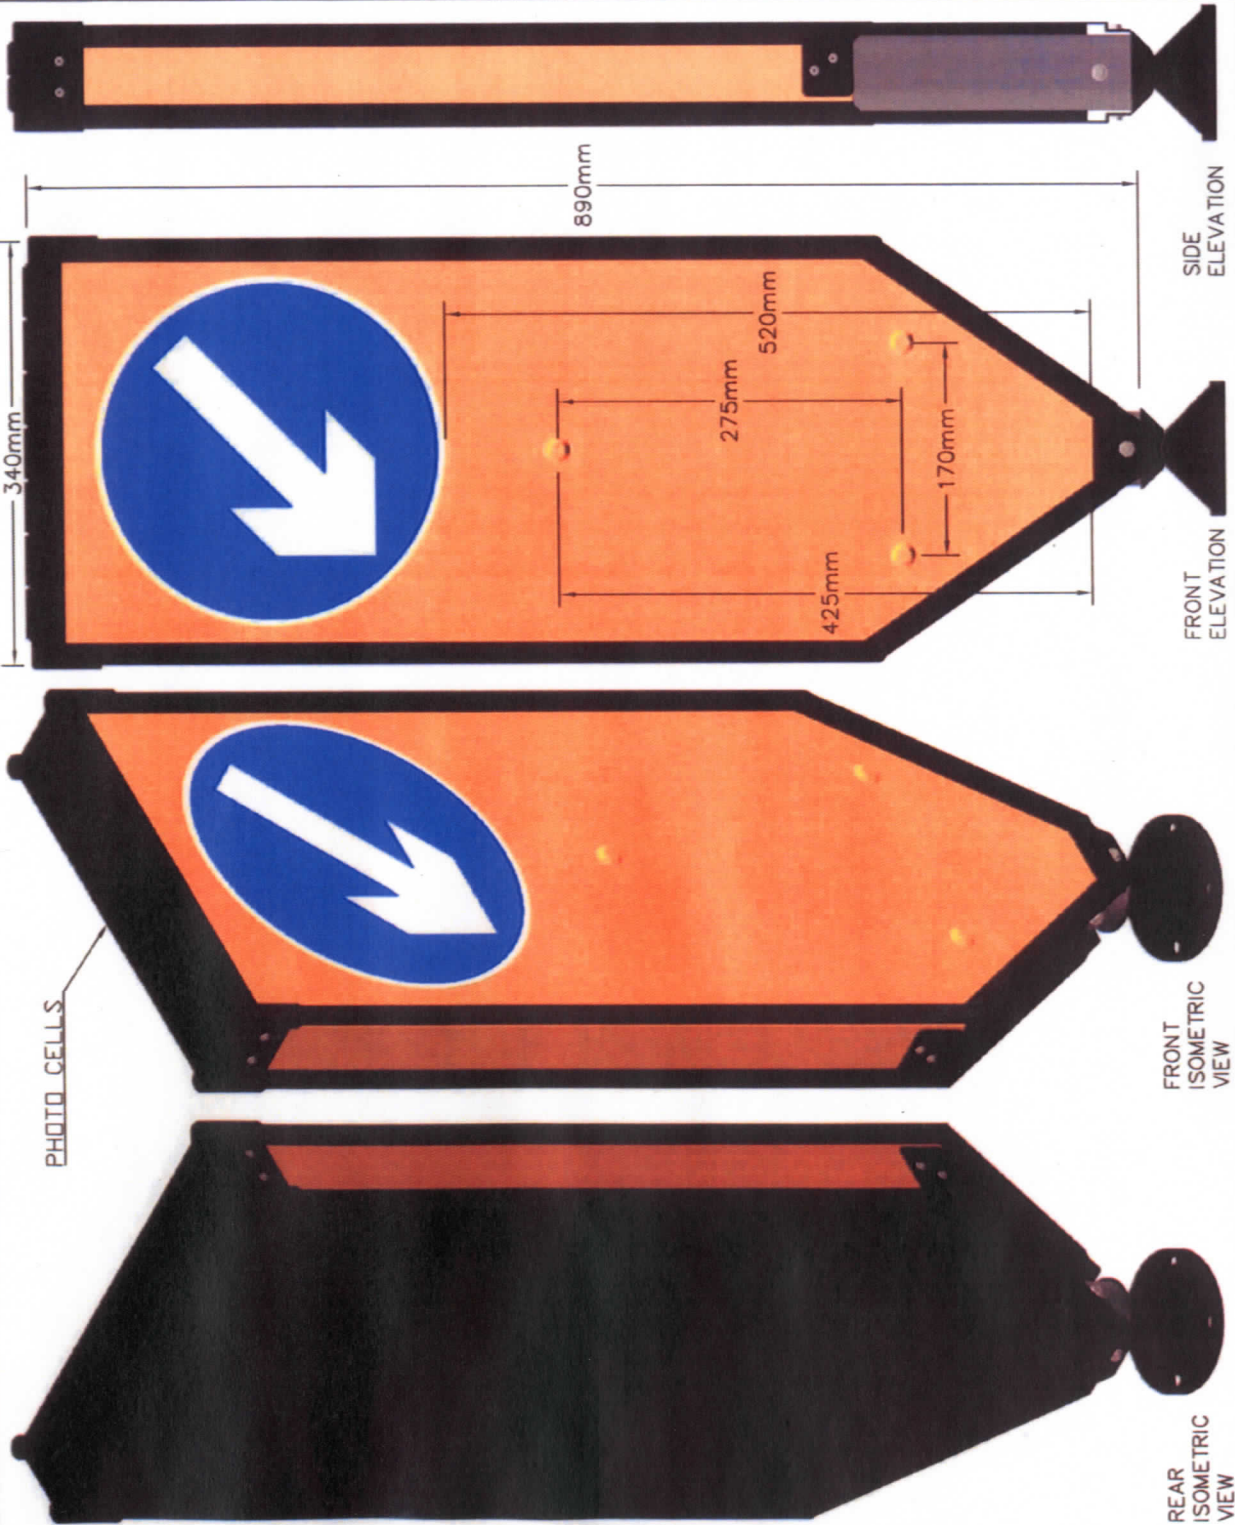

SIGN FACE P610:
BORDER WHITE 4090T
BACKGROUND
BLUE TRANSLUCENT
ARROW WHITE 4090T
DIAMETER 280mm
DG3(DIAMOND GRADE CUBED)
BS8408: 2005

CLEAR ILLUMINATED BACK
PLATE TO ROUNDEL AT
280mm DIAMETER

DRILL HOLES
11MM-5MM DIAMETER
470MM-13MM DIAMETER
840MM-13MM DIAMETER

FACING DIMENSIONS:
WIDTH: 300mm
HEIGHT: 809.5mm
AREA: 0.243sq.m
FLUORESCENT YELLOW 4051
DG3(DIAMOND GRADE CUBED)
BS8408: 2005

SIDE STRIPS:
WIDTH: 40mm
HEIGHT: 645mm
FLUORESCENT YELLOW 4051
DG3(DIAMOND GRADE CUBED)
BS8408: 2005

MATERIAL:
VACUUM FORMED
POLYPROPYLENE
BLACK

Approved by:

Date:

Design by DJN

Drawn by AC

Tolerance $\pm 1.0\text{mm}$

Revision # 3

Date 9/11/2007

Reference

TMP Ltd | **TMP SOLALITE PLUS D610**

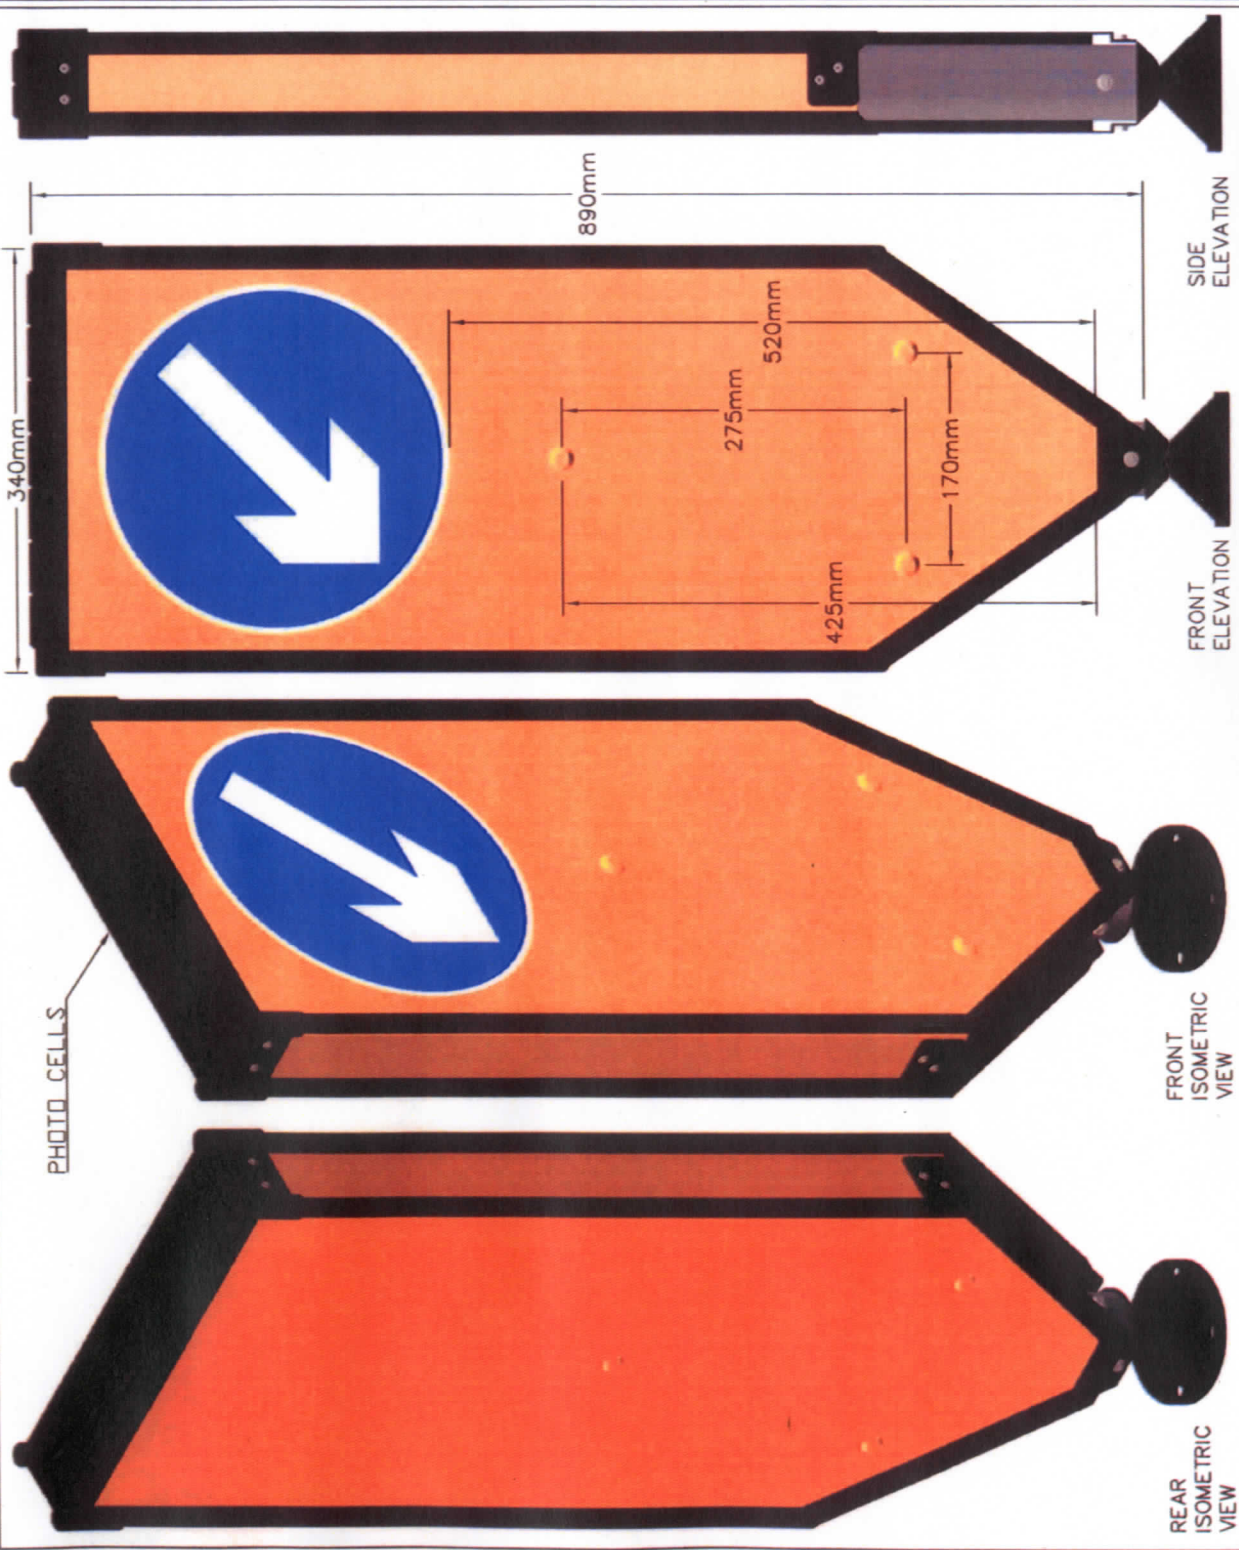


PHOTO CELLS

REAR ISOMETRIC VIEW

FRONT ISOMETRIC VIEW

FRONT ELEVATION

SIDE ELEVATION

SIGN FACE P610:
 BORDER WHITE 4090T
 BACKGROUND
 BLUE TRANSLUCENT
 ARROW WHITE 4090T
 DIAMETER 280mm
 DG3(DIAMOND GRADE CUBED)
 BS8408:2005

CLEAR ILLUMINATED BACK
 PLATE TO ROUNDEL AT
 280mm DIAMETER

DRILL HOLES
 11MM-5MM DIAMETER
 470MM-13MM DIAMETER
 840MM-13MM DIAMETER

FACING DIMENSIONS:
 WIDTH: 300mm
 HEIGHT: 809.5mm
 AREA: 0.243sq.m
 APPLIED TO FRONT AND
 REAR

FLUORESCENT YELLOW 4051
 DG3(DIAMOND GRADE CUBED)
 BS8408:2005

SIDE STRIPS:
 WIDTH: 40mm
 HEIGHT: 645mm
 FLUORESCENT YELLOW 4051
 DG3(DIAMOND GRADE CUBED)
 BS8408:2005

MATERIAL:
 VACUUM FORMED
 POLYPROPYLENE
 BLACK

Approved by:

Date:

Design by	DJN
Drawn by	AC
Tolerance	± 1.0mm
Revision #	2
Date	9/11/2007
Reference	