



**ROAD TRAFFIC REGULATION ACT 1984 – SECTIONS 64 AND 65
AUTHORISATION OF TRAFFIC SIGNS AND SPECIAL DIRECTIONS**

The Secretary of State for Transport, in exercise of her powers under sections 64 and 65 of the Road Traffic Regulation Act 1984, and of all other powers enabling her in that behalf, for the purpose of informing road users of restrictions, requirements or prohibitions and information at appropriate sites on roads for which Lincolnshire County Council is the traffic authority, hereby:-

Bus stop clearway and taxi ranks at different times of the day

1. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as “the Authorised Sign A”) conforming as to size, colour and character with that referenced “Authorised Sign A” in the attached set of drawings numbered GT50/068/0008-1, save that:
 - the legend “BUS STAND” may be omitted; and
 - the legend “local” may be omitted; and
 - the references to the time of day may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to the day of the week may be added; and
 - references to bank or public holidays may be included; and
 - the direction of an arrow may be varied with the arrow pointing horizontally to the right; and
 - the arrow may be omitted; and
2. directs that, notwithstanding the provisions of Direction 25(1) of the Traffic Signs General Directions 2002 (Part II of SI 2002/3113, “the 2002 Directions”), any of the road markings shown in diagrams 1025.1, 1025.3 and 1025.4 in Schedule 6 to the Traffic Signs Regulations 2002 (Part I of SI 2002/3113, “the 2002 Regulations”) may be used in conjunction with the Authorised Sign A; and
3. directs that any of the road markings shown in diagrams 1025.1, 1025.3 and diagram 1025.4 shall include the legend “BUS STOP” when the legend “BUS STAND” is omitted from the Authorised Sign A; and

**Bus stop clearway with loading only**

4. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign B") conforming as to size, colour and character with that referenced "Authorised Sign B" in the said set of drawings, save that:
 - the legend "BUS STAND" may be omitted; and
 - the legend "local" may be omitted; and
 - the references to the time limit, the time of day or to the day of the week may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to bank or public holidays may be included; and
 - the direction of the arrows may be varied with the arrows pointing horizontally to the right; and
 - the arrows may be omitted; and
 - the legend "Goods vehicles" may be omitted, in which case the legend "loading" shall be varied to "Loading"; and
5. directs that, notwithstanding the provisions of Direction 25(1) of the 2002 Directions, any of the road markings shown in diagrams 1025.1, 1025.3 and 1025.4 in Schedule 6 to the 2002 Regulations may be used in conjunction with the Authorised Sign B; and
6. directs that any of the road markings shown in diagrams 1025.1, 1025.3 and 1025.4 shall include the legend "BUS STOP" when the legend "BUS STAND" is omitted from the Authorised Sign B; and

No stopping except taxis and loading only

7. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign C") conforming as to size, colour and character with that referenced "Authorised Sign C" in the said set of drawings, save that:
 - the legend "Goods vehicles" may be omitted, in which case the legend "loading" shall be varied to "Loading"; and
 - the references to the time limit, the time of day or to the day of the week may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to bank or public holidays may be included; and
 - the direction of the arrows may be varied with the arrows pointing horizontally to the right; and
 - the arrows may be omitted; and



8. authorises the placing within the vicinity of the said sites on the said roads of a traffic sign consisting of a road marking (hereafter referred to as "the Authorised Marking A") conforming as to the size, colour and character with the road marking shown in diagram 1028.3, when no legend appears, in Schedule 6 to the 2002 Regulations, save that a continuous longitudinal yellow line 200 millimetres wide shall be placed along the edge of the carriageway in the manner shown in diagram 1025.1 in Schedule 6 to the 2002 Regulations; and
9. directs that the Authorised Sign C shall be placed only in conjunction with the Authorised Marking A; and
10. directs that the Authorised Marking A shall be placed only in conjunction with the Authorised Sign C; and

No stopping except taxis and limited waiting

11. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign D") conforming as to size, colour and character with that referenced "Authorised Sign D" in the said set of drawings, save that:
 - the references to the time limit, the time of day or to the day of the week may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to bank or public holidays may be included; and
 - the direction of the arrows may be varied with the arrows pointing horizontally to the right; and
 - the arrows may be omitted; and
12. authorises the placing within the vicinity of the said sites on the said roads of traffic sign consisting of a road marking (hereafter referred to as "the Authorised Marking B") conforming as to the size, colour and character with the road marking shown in diagram 1028.4, when no legend appears, in Schedule 6 to the 2002 Regulations, save that a continuous longitudinal yellow line 200 millimetres wide shall be placed along the edge of the carriageway in the manner shown in diagram 1025.1 in Schedule 6 to the 2002 Regulations; and
13. directs that the Authorised Sign D shall be placed only in conjunction with the Authorised Marking B; and
14. directs that the Authorised Marking B shall be placed only in conjunction with the Authorised Sign D; and

**Loading only and limited waiting**

15. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign E") conforming as to size, colour and character with that referenced "Authorised Sign E" in the said set of drawings, save that:
- the legend "Goods vehicles" may be omitted, in which case the legend "loading" shall be varied to "Loading"; and
 - the references to the time limit, the time of day or to the day of the week may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to bank or public holidays may be included; and
 - the direction of the arrows may be varied with the arrows pointing horizontally to the right; and
 - the arrows may be omitted; and
16. directs that, notwithstanding the provisions of Direction 25(1) of the 2002 Directions, any of the road markings shown in diagrams 1028.3, 1028.4, 1032 and 1033, in each case when no legend appears, in Schedule 6 to the 2002 Regulations, may be used in conjunction with the Authorised Sign E; and

Loading only and disabled badge parking

17. authorises the erection at appropriate sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign F") conforming as to size, colour and character with that referenced "Authorised Sign F" in the said set of drawings, save that:
- the legend "Goods vehicles" may be omitted, in which case the legend "loading" shall be varied to "Loading"; and
 - the references to the time limit, the time of day or to the day of the week may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to bank or public holidays may be included; and
 - the direction of the arrows may be varied with the arrows pointing horizontally to the right; and
 - the arrows may be omitted; and
18. directs that, notwithstanding the provisions of Direction 25(1) of the 2002 Directions, any of the road markings shown in diagrams 1028.3, 1032 and 1033, in each case when no legend appears, in Schedule 6 to the 2002 Regulations, may be used in conjunction with the Authorised Sign F; and



Pay by phone parking

19. authorises the erection, at appropriate sites on the said roads, of a traffic sign (hereinafter referred to as "the Authorised Sign G") conforming as to size, colour and character with that referenced "Authorised Sign G" in the said set of drawings, save that:
- the references to the time limit, the time of day or the day of the week may be varied or omitted; and
 - references to the month of the year may be added; and
 - references to bank or public holidays may be included; and
 - the legend "Resident" may be omitted, in which case the legend "permit holders" shall be varied to "Permit holders"; and
 - the legend "Resident permit holders" may be omitted, in which case the permit parking identification patch shall also be omitted; and
 - the permit parking identification patch may be varied; and
 - the telephone number, the text number and the location code may be varied; and
 - the legend "or text" may be omitted, in which case the text number shall be omitted; and
 - the legend "Pay at machine" may be replaced by the legend "Pay at machine opposite" (on two lines), in which case the arrow shall be omitted; and
 - the legend "Pay at machine" may be replaced by the legend "Pay here at machine" (on two lines), in which case the arrow shall be omitted; and
 - an arrow may be added below the reference to the time of day; and
 - the direction of an arrow may be varied with the arrow pointing horizontally to the left or to the right; and
20. directs that, notwithstanding the provisions of Direction 25(1) of the 2002 Directions, any of the road markings shown in diagrams 1028.4, 1032 and 1033, in each case when no legend appears, in Schedule 6 to the 2002 Regulations, may be used in conjunction with the Authorised Sign G; and

Chevron signs to denote a sharp change in the direction of the road

21. authorises the erection at the said sites on the said roads, of a traffic sign (hereinafter referred to as "the Authorised Sign H") conforming as to size, colour and character with that referenced "Authorised Sign H" in the said set of drawings; and
22. authorises the erection at appropriate roundabout sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign I") conforming as to size, colour and character with that referenced "Authorised Sign I" in the said set of drawings; and

**School children warning and advisory 20 mph limit**

23. authorises the erection at the said sites on the said roads of a traffic sign consisting of a plate (hereinafter referred to as "the Authorised Plate A") conforming as to size, colour and character with that referenced "Authorised Plate A" in the said set of drawings; and
24. directs that, notwithstanding the provisions of Direction 55(1) of the 2002 Directions, the Authorised Plate A shall be placed between the sign shown in diagram 545 in Schedule 1 to the 2002 Regulations (placed uppermost) and the light signals shown in diagram 4004 in Schedule 9 to the 2002 Regulations; and

Private Hire Vehicles and solo motorcycles in near-side with-flow bus lanes

25. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign J") conforming as to size, colour and character with that referenced "NP 958.12" in the said set of drawings; and
26. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign K") conforming as to size, colour and character with that referenced "NP 959.10" in the said set of drawings; and
27. directs that, notwithstanding the provisions of Direction 21 of the 2002 Directions, the plate shown in diagrams 961 in Schedule 5 to the 2002 Regulations may be used in conjunction with the Authorised Signs J and K; and
28. directs that the Authorised Sign J may be used in the vicinity of the road marking to diagram 1010 (when laid diagonally) in Schedule 6 to the 2002 Regulations; and
29. directs that, notwithstanding the provisions of Direction 18(3) of the 2002 Directions, the road markings shown in diagrams 1048 and 1049 in Schedule 6 to the 2002 Regulations shall be used in conjunction with the Authorised Sign K; and

Private Hire Vehicles in near-side with-flow bus lanes

30. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign L") conforming as to size, colour and character with that referenced "NP 958.13" in the said set of drawings; and
31. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign M") conforming as to size, colour and character with that referenced "NP 959.11" in the said set of drawings; and
32. directs that, notwithstanding the provisions of Direction 21 of the 2002 Directions, the plate shown in diagram 961 in Schedule 5 to the 2002 Regulations may be used in conjunction with the Authorised Signs L and M; and
33. directs that the Authorised Sign L may be used in the vicinity of the road marking to diagram 1010 (when laid diagonally) in Schedule 6 to the 2002 Regulations; and



34. directs that, notwithstanding the provisions of Direction 18(3) of the 2002 Directions, the road markings shown in diagrams 1048 and 1049 in Schedule 6 to the 2002 Regulations shall be used in conjunction with the Authorised Sign M; and

Rising bollards

35. authorises the erection at the said sites on the said roads of a traffic sign (hereinafter referred to as "the Authorised Sign N") conforming as to size, colour and character with that referenced "Authorised Sign N" in the said set of drawings; and
36. authorises the erection at the said sites on the said roads of a traffic sign consisting of a plate (hereinafter referred to as "the Authorised Plate B") conforming as to size, colour and character with that referenced "the Authorised Plate B" in the said set of drawings; and
37. authorises the erection at the said sites on the said roads of a traffic sign consisting of a light signal (hereinafter referred to as "the Authorised Indicator") conforming as to the light signal shown in diagram 3000 in Schedule 8 to the 2002 Regulations, save that:
- the amber aspect shall be omitted; and
 - the red aspect and the green aspect shall have a minimum diameter of 100 millimetres; and
 - the minimum mounting height of the centre of the green aspect shall be 1000 millimetres; and
38. directs that the Authorised Sign N shall be placed to face waiting drivers; and
39. directs that, notwithstanding the provisions of Direction 20(1) of the 2002 Directions, the sign shown in diagram 562 in Schedule 1 to the 2002 Regulations may be used in combination with the Authorised Plate B; and
40. directs that the green indicator contained in the Authorised Indicator shall be illuminated only while the bollards referred to on the Authorised Sign N are fully retracted, and that the red indicator shall be illuminated at all other times; and
41. directs that the Authorised Indicator may be erected at the said sites only if the apparatus used in connection with it (including the content of all instructions stored in or executable by it) has been approved in writing by the Secretary of State; and

Countdown

42. authorises the erection at the said sites on the said roads of a traffic sign consisting of a light signal (hereinafter referred to as "the Authorised Light Signal") conforming as to size, colour and character with either of the designs referenced "Authorised Light Signal" in the said set of drawings; and



43. directs that, notwithstanding the provision of Direction 55(4) of the 2002 Directions, the Authorised Light Signal shall be used in conjunction with the light signal shown in diagram 4003 in Schedule 9 to the 2002 Regulations; and
44. directs that the Authorised Light Signal may only be placed at the said sites if the apparatus (including the content of all instructions stored in it) used in connection with it is of a type which has been agreed by the Secretary of State as appropriate to the site and application; and
45. directs that the Authorised Light Signal shall be used in conjunction with the light signal shown in diagram 3000 in Schedule 8 to the 2002 Regulations; and
46. directs that the countdown unit in the Authorised Light Signal shall only be illuminated when the red and green pedestrian aspects of the said signal are not illuminated, and shall not be illuminated at any other time; and

In the Authorised Light Signal:

- the red pedestrian aspect, while it is illuminated, shall convey to pedestrians the warning that, in the interests of safety, they should not cross the carriageway; and
- the green pedestrian aspect, while it is illuminated, shall convey to pedestrians the indication that they may cross the carriageway; and
- the countdown unit, while it is illuminated, shall convey to pedestrians the remaining time in which they may cross the carriageway; and

Contrasting bays

47. authorises the placing at the said sites on the said roads of a traffic sign consisting of a road marking (hereinafter referred to as "the Authorised Marking C") conforming as to size with the road marking shown in diagram 1028.3, when no legend appears, in Schedule 6 to the 2002 Regulations, save that the Authorised Marking C shall be delineated with surfacing or paving contrasting in colour or appearance with the surrounding carriageway; and
48. authorises the placing at the said sites on the said roads of a traffic sign consisting of a road marking (hereinafter referred to as "the Authorised Marking D") conforming as to size with the road marking shown in diagram 1028.4, when no legend appears, in Schedule 6 to the 2002 Regulations, save that the Authorised Marking D shall be delineated with surfacing or paving contrasting in colour or appearance with the surrounding carriageway; and
49. authorises the placing at the said sites on the said roads of a traffic sign consisting of a road marking (hereinafter referred to as "the Authorised Marking E") conforming as to size with the road marking shown in diagram 1033, when no legend appears, in Schedule 6 to the 2002 Regulations, save that the Authorised Marking E shall be delineated with surfacing or paving contrasting in colour or appearance with the surrounding carriageway; and



50. directs that, notwithstanding the provisions of Direction 24(1) of the 2002 Directions, any of the signs shown in diagrams 639.1B, 660, 660.4 and 661.1, in Schedule 2 to the 2002 Regulations may be used in conjunction with the Authorised Marking C; and
51. directs that, notwithstanding the provisions of Direction 24(1) of the 2002 Directions, any of the signs shown in diagrams 660, 660.3, 660.5, 660.6, 660.7, 661.2A, 661.3A and 662 in Schedule 2 to the 2002 Regulations may be used in conjunction with the Authorised Marking D; and
52. directs that, notwithstanding the provisions of Direction 24(1) of the 2002 Directions, any of the signs shown in diagrams 660, 660.3, 660.4, 660.5, 660.6, 660.7, 661.1, 661.2A, 661.3A and 662 in Schedule 2 to the 2002 Regulations may be used in conjunction with the Authorised Marking E; and
53. directs that it is a condition of this authorisation that the Authorised Signs A, B, C, D, E, F, G, I, K, M and N, the Authorised Plate B, the Authorised Indicator, and the Authorised Markings A, B, C, D and E may be placed only to indicate the effect of a corresponding Traffic Regulation Order; and
54. directs, without prejudice to any statutory provision to the like effect, that it is a condition of this authorisation that the erection of the Authorised Signs A, B, C, D, E, F, G, H, I, J, K, L, M and N, the Authorised Plates A and B, the Authorised Indicator, the Authorised Light Signal, and the Authorised Markings A, B, C, D and E, at or near the said sites shall continue to have effect only until such day as may be appointed by one month's notice given by the Secretary of State in writing to the traffic authority for the removal or alteration of the Authorised Signs A, B, C, D, E, F, G, H, I, J, K, L, M and N, the Authorised Plates A and B, the Authorised Indicator, the Authorised Light Signal, and the Authorised Markings A, B, C, D and E, and on that day the said authorisation shall, without prejudice to the giving of any further authorisation or direction, cease to have effect.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Sign A in the same manner as they apply to the sign shown in diagram 975 in Schedule 5 to those Regulations.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Signs B, C, and D in the same manner as they apply to the sign shown in diagram 639.1B in Schedule 2 to those Regulations.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to any of the Authorised Signs E, F and G in the same manner as they apply to the sign shown in diagram 660.4 in Schedule 2 to those Regulations.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Sign H in the same manner as they apply to the sign shown in diagram 515.1 in Schedule 1 to those Regulations.



The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Sign I in the same manner as they apply to both the sign shown in diagram 515.1A in Schedule 1 to those Regulations and to the sign shown in diagram 606 in Schedule 2 to those Regulations.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Signs J and L in the same manner as they apply to the sign shown in diagram 958 in Schedule 5 to those Regulations.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Signs K and M in the same manner as they apply to the sign shown in diagram 959 in Schedule 5 to those Regulations.

The provisions of Regulations 12, 17, 18 and 19 of the 2002 Regulations shall apply to the Authorised Sign N in the same manner as they apply to the sign shown in diagram 637.2 in Schedule 2 to those Regulations.

The provisions of Regulations 12 and 20 of the 2002 Regulations shall apply to the Authorised Plates A and B in the same manner as they apply to the plate shown in diagram 563 when used in combination with the sign shown in diagram 562 in Schedule 1 to those Regulations.

The provisions of Regulations 12 of the 2002 Regulations shall apply to the Authorised Indicator in the same manner as they apply to the sign shown in diagram 4002.1 in Schedule 9 to those Regulations.

The provisions of Regulations 12 and 47 of the 2002 Regulations shall apply to the Authorised Light Signal in the same manner as they apply to the light signal shown in diagram 4002.1 in Schedule 9 to those Regulations.

The provisions of Regulations 12, 31 and 43 of the 2002 Regulations shall apply to the Authorised Markings A and B in the same manner as they apply to the road marking shown in diagram 1028.3 in Schedule 6 to those Regulations.

The provisions of Regulation 12 of the 2002 Regulations shall apply to the Authorised Markings C, D and E in the same manner as they apply to the road marking shown in diagram 1028.3 in Schedule 6 to those Regulations.

Dated 17 October 2011

Signed by authority of the Secretary of State

.....
A Delegated Official in the Department for Transport





Authorised Sign A	Tile edges do not form part of the sign
x-height (mm)	20 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 4
Colours	See Appendix
Department for Transport	GT50/068/0008-1
Date	17 October 2011



Authorised Sign B	Tile edges do not form part of the sign
x-height (mm)	20 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 4
Colours:	See Appendix



Authorised Sign C	Tile edges do not form part of the sign
x-height (mm)	20 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 4
Colours:	See Appendix



Authorised Sign D	Tile edges do not form part of the sign
x-height (mm)	20 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 4
Colours:	See Appendix



Authorised Sign E	Tile edges do not form part of the sign
x-height (mm)	15 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 9
Colours:	See Appendix




Authorised Sign F	Tile edges do not form part of the sign
x-height (mm)	15 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 9
Colours:	See Appendix



Authorised Sign G	Tile edges do not form part of the sign
x-height (mm)	15 min - 40 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 9
Colours:	See Appendix

MODEL SPECIFICATION - ADVANCED CHEVROFLEX™ - HIGH VISIBILITY BACKING
BENDS

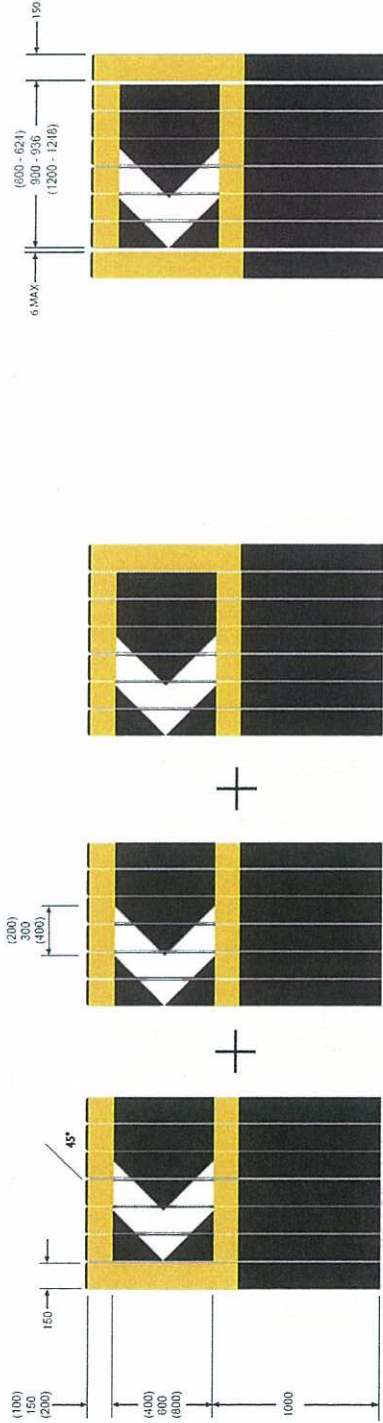

SINGLE CHEVRON

END

MIDDLE

END

Number of Uprights
will vary as shown.

- 400 Chevron = 4
- 600 Chevron = 6
- 800 Chevron = 8

Notes:

1. Authorisation is required from the Department for Transport in order for this product to be used. This will be granted on an authority wide basis.
2. Fluorescent yellow and white retroreflective material shown from 025061-S17 are as recommended in table NA11 of the National Annex of BS EN 12899-1 2007 Fixed Vertical Road Signs.
Microprismatic retroreflective materials used on our products meet the requirements of BS 8406 2005 Road Traffic Signs. Testing and Performance of Microprismatic Retroreflective Sheeting Materials when sited normally and used for their normal application.
3. Left Hand Bend shown. The direction of the chevron may be varied with the chevron pointing horizontally to the left or to the right.

ORG. TITLE		PROJECT		PROJECT No		DATE		09/06/10	
DRG. No		SCALE		B Diep		CHECKED		SPECIFICATION No. 025061-S17 ISSUE 2	
DRAWN BY		DATE		09/06/10		CHECKED		SHEET SIZE A2	

GLASDON GROUP LTD 09 05 10




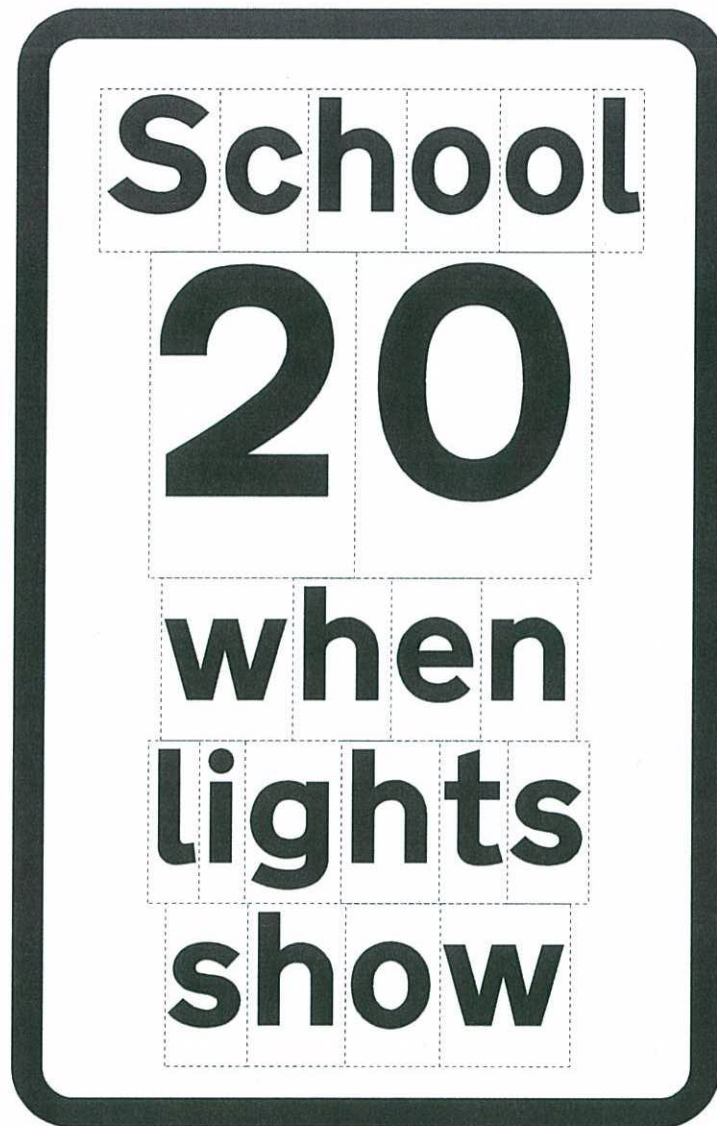
Glasdon Group Limited
IEC, Preston New Road,
Bacup, Lancashire, FY4 4UY
Telephone: 01253 600400
Fax: 01253 752555
e-mail: design@glasdon.com
website: www.glasdon.com



1. Authorisation is required from the Department for Transport in order for this product to be used. This will be granted on an authority *vide* basis.
2. Fluorescent yellow and white retroreflective material shown from 025061-S18 are as recommended in table NA1 of the National Annex of BS EN 12895-1:2007 Fixed Vertical Road Signs.



Microprismatic retroreflective materials used on our products meet the requirements of BS 8408 2005 Road Traffic Signs. Testing and Performance of Microprismatic Retroreflective Sheet Materials when sited normally used for their normal application.

DRG TITLE	 Glasdon® Glasdon Group Limited IEC Preston New Road, Blackpool, Lancashire, FY4 4JY Telephone: 01253 600-000 Fax: 01253 762558 e-mail: design@glasdon.com website: www.glasdon.com				SPECIFICATION No. 032051-51E	ISSUE 2					
	DRG No.	PROJECT No.	DATE	09/06/10	CH-SECB	2-GLASDON GROUP PLM 3-DWG 3-DWG 4-DWG 5-DWG 6-DWG 7-DWG 8-DWG 9-DWG 10-DWG 11-DWG 12-DWG 13-DWG 14-DWG 15-DWG 16-DWG 17-DWG 18-DWG 19-DWG 20-DWG 21-DWG 22-DWG 23-DWG 24-DWG 25-DWG 26-DWG 27-DWG 28-DWG 29-DWG 30-DWG 31-DWG 32-DWG 33-DWG 34-DWG 35-DWG 36-DWG 37-DWG 38-DWG 39-DWG 40-DWG 41-DWG 42-DWG 43-DWG 44-DWG 45-DWG 46-DWG 47-DWG 48-DWG 49-DWG 50-DWG 51-DWG 52-DWG 53-DWG 54-DWG 55-DWG 56-DWG 57-DWG 58-DWG 59-DWG 60-DWG 61-DWG 62-DWG 63-DWG 64-DWG 65-DWG 66-DWG 67-DWG 68-DWG 69-DWG 70-DWG 71-DWG 72-DWG 73-DWG 74-DWG 75-DWG 76-DWG 77-DWG 78-DWG 79-DWG 80-DWG 81-DWG 82-DWG 83-DWG 84-DWG 85-DWG 86-DWG 87-DWG 88-DWG 89-DWG 90-DWG 91-DWG 92-DWG 93-DWG 94-DWG 95-DWG 96-DWG 97-DWG 98-DWG 99-DWG 100-DWG 101-DWG 102-DWG 103-DWG 104-DWG 105-DWG 106-DWG 107-DWG 108-DWG 109-DWG 110-DWG 111-DWG 112-DWG 113-DWG 114-DWG 115-DWG 116-DWG 117-DWG 118-DWG 119-DWG 120-DWG 121-DWG 122-DWG 123-DWG 124-DWG 125-DWG 126-DWG 127-DWG 128-DWG 129-DWG 130-DWG 131-DWG 132-DWG 133-DWG 134-DWG 135-DWG 136-DWG 137-DWG 138-DWG 139-DWG 140-DWG 141-DWG 142-DWG 143-DWG 144-DWG 145-DWG 146-DWG 147-DWG 148-DWG 149-DWG 150-DWG 151-DWG 152-DWG 153-DWG 154-DWG 155-DWG 156-DWG 157-DWG 158-DWG 159-DWG 160-DWG 161-DWG 162-DWG 163-DWG 164-DWG 165-DWG 166-DWG 167-DWG 168-DWG 169-DWG 170-DWG 171-DWG 172-DWG 173-DWG 174-DWG 175-DWG 176-DWG 177-DWG 178-DWG 179-DWG 180-DWG 181-DWG 182-DWG 183-DWG 184-DWG 185-DWG 186-DWG 187-DWG 188-DWG 189-DWG 190-DWG 191-DWG 192-DWG 193-DWG 194-DWG 195-DWG 196-DWG 197-DWG 198-DWG 199-DWG 200-DWG 201-DWG 202-DWG 203-DWG 204-DWG 205-DWG 206-DWG 207-DWG 208-DWG 209-DWG 210-DWG 211-DWG 212-DWG 213-DWG 214-DWG 215-DWG 216-DWG 217-DWG 218-DWG 219-DWG 220-DWG 221-DWG 222-DWG 223-DWG 224-DWG 225-DWG 226-DWG 227-DWG 228-DWG 229-DWG 230-DWG 231-DWG 232-DWG 233-DWG 234-DWG 235-DWG 236-DWG 237-DWG 238-DWG 239-DWG 240-DWG 241-DWG 242-DWG 243-DWG 244-DWG 245-DWG 246-DWG 247-DWG 248-DWG 249-DWG 250-DWG 251-DWG 252-DWG 253-DWG 254-DWG 255-DWG 256-DWG 257-DWG 258-DWG 259-DWG 260-DWG 261-DWG 262-DWG 263-DWG 264-DWG 265-DWG 266-DWG 267-DWG 268-DWG 269-DWG 270-DWG 271-DWG 272-DWG 273-DWG 274-DWG 275-DWG 276-DWG 277-DWG 278-DWG 279-DWG 280-DWG 281-DWG 282-DWG 283-DWG 284-DWG 285-DWG 286-DWG 287-DWG 288-DWG 289-DWG 290-DWG 291-DWG 292-DWG 293-DWG 294-DWG 295-DWG 296-DWG 297-DWG 298-DWG 299-DWG 300-DWG 301-DWG 302-DWG 303-DWG 304-DWG 305-DWG 306-DWG 307-DWG 308-DWG 309-DWG 310-DWG 311-DWG 312-DWG 313-DWG 314-DWG 315-DWG 316-DWG 317-DWG 318-DWG 319-DWG 320-DWG 321-DWG 322-DWG 323-DWG 324-DWG 325-DWG 326-DWG 327-DWG 328-DWG 329-DWG 330-DWG 331-DWG 332-DWG 333-DWG 334-DWG 335-DWG 336-DWG 337-DWG 338-DWG 339-DWG 340-DWG 341-DWG 342-DWG 343-DWG 344-DWG 345-DWG 346-DWG 347-DWG 348-DWG 349-DWG 350-DWG 351-DWG 352-DWG 353-DWG 354-DWG 355-DWG 356-DWG 357-DWG 358-DWG 359-DWG 360-DWG 361-DWG 362-DWG 363-DWG 364-DWG 365-DWG 366-DWG 367-DWG 368-DWG 369-DWG 370-DWG 371-DWG 372-DWG 373-DWG 374-DWG 375-DWG 376-DWG 377-DWG 378-DWG 379-DWG 380-DWG 381-DWG 382-DWG 383-DWG 384-DWG 385-DWG 386-DWG 387-DWG 388-DWG 389-DWG 390-DWG 391-DWG 392-DWG 393-DWG 394-DWG 395-DWG 396-DWG 397-DWG 398-DWG 399-DWG 400-DWG 401-DWG 402-DWG 403-DWG 404-DWG 405-DWG 406-DWG 407-DWG 408-DWG 409-DWG 410-DWG 411-DWG 412-DWG 413-DWG 414-DWG 415-DWG 416-DWG 417-DWG 418-DWG 419-DWG 420-DWG 421-DWG 422-DWG 423-DWG 424-DWG 425-DWG 426-DWG 427-DWG 428-DWG 429-DWG 430-DWG 431-DWG 432-DWG 433-DWG 434-DWG 435-DWG 436-DWG 437-DWG 438-DWG 439-DWG 440-DWG 441-DWG 442-DWG 443-DWG 444-DWG 445-DWG 446-DWG 447-DWG 448-DWG 449-DWG 450-DWG 451-DWG 452-DWG 453-DWG 454-DWG 455-DWG 456-DWG 457-DWG 458-DWG 459-DWG 460-DWG 461-DWG 462-DWG 463-DWG 464-DWG 465-DWG 466-DWG 467-DWG 468-DWG 469-DWG 470-DWG 471-DWG 472-DWG 473-DWG 474-DWG 475-DWG 476-DWG 477-DWG 478-DWG 479-DWG 480-DWG 481-DWG 482-DWG 483-DWG 484-DWG 485-DWG 486-DWG 487-DWG 488-DWG 489-DWG 490-DWG 491-DWG 492-DWG 493-DWG 494-DWG 495-DWG 496-DWG 497-DWG 498-DWG 499-DWG 500-DWG 501-DWG 502-DWG 503-DWG 504-DWG 505-DWG 506-DWG 507-DWG 508-DWG 509-DWG 510-DWG 511-DWG 512-DWG 513-DWG 514-DWG 515-DWG 516-DWG 517-DWG 518-DWG 519-DWG 520-DWG 521-DWG 522-DWG 523-DWG 524-DWG 525-DWG 526-DWG 527-DWG 528-DWG 529-DWG 530-DWG 531-DWG 532-DWG 533-DWG 534-DWG 535-DWG 536-DWG 537-DWG 538-DWG 539-DWG 540-DWG 541-DWG 542-DWG 543-DWG 544-DWG 545-DWG 546-DWG 547-DWG 548-DWG 549-DWG 550-DWG 551-DWG 552-DWG 553-DWG 554-DWG 555-DWG 556-DWG 557-DWG 558-DWG 559-DWG 560-DWG 561-DWG 562-DWG 563-DWG 564-DWG 565-DWG 566-DWG 567-DWG 568-DWG 569-DWG 570-DWG 571-DWG 572-DWG 573-DWG 574-DWG 575-DWG 576-DWG 577-DWG 578-DWG 579-DWG 580-DWG 581-DWG 582-DWG 583-DWG 584-DWG 585-DWG 586-DWG 587-DWG 588-DWG 589-DWG 590-DWG 591-DWG 592-DWG 593-DWG 594-DWG 595-DWG 596-DWG 597-DWG 598-DWG 599-DWG 600-DWG 601-DWG 602-DWG 603-DWG 604-DWG 605-DWG 606-DWG 607-DWG 608-DWG 609-DWG 610-DWG 611-DWG 612-DWG 613-DWG 614-DWG 615-DWG 616-DWG 617-DWG 618-DWG 619-DWG 620-DWG 621-DWG 622-DWG 623-DWG 624-DWG 625-DWG 626-DWG 627-DWG 628-DWG 629-DWG 630-DWG 631-DWG 632-DWG 633-DWG 634-DWG 635-DWG 636-DWG 637-DWG 638-DWG 639-DWG 640-DWG 641-DWG 642-DWG 643-DWG 644-DWG 645-DWG 646-DWG 647-DWG 648-DWG 649-DWG 650-DWG 651-DWG 652-DWG 653-DWG 654-DWG 655-DWG 656-DWG 657-DWG 658-DWG 659-DWG 660-DWG 661-DWG 662-DWG 663-DWG 664-DWG 665-DWG 666-DWG 667-DWG 668-DWG 669-DWG 670-DWG 671-DWG 672-DWG 673-DWG 674-DWG 675-DWG 676-DWG 677-DWG 678-DWG 679-DWG 680-DWG 681-DWG 682-DWG 683-DWG 684-DWG 685-DWG 686-DWG 687-DWG 688-DWG 689-DWG 690-DWG 691-DWG 692-DWG 693-DWG 694-DWG 695-DWG 696-DWG 697-DWG 698-DWG 699-DWG 700-DWG 701-DWG 702-DWG 703-DWG 704-DWG 705-DWG 706-DWG 707-DWG 708-DWG 709-DWG 710-DWG 711-DWG 712-DWG 713-DWG 714-DWG 715-DWG 716-DWG 717-DWG 718-DWG 719-DWG 720-DWG 721-DWG 722-DWG 723-DWG 724-DWG 725-DWG 726-DWG 727-DWG 728-DWG 729-DWG 730-DWG 731-DWG 732-DWG 733-DWG 734-DWG 735-DWG 736-DWG 737-DWG 738-DWG 739-DWG 740-DWG 741-DWG 742-DWG 743-DWG 744-DWG 745-DWG 746-DWG 747-DWG 748-DWG 749-DWG 750-DWG 751-DWG 752-DWG 753-DWG 754-DWG 755-DWG 756-DWG 757-DWG 758-DWG 759-DWG 760-DWG 761-DWG 762-DWG 763-DWG 764-DWG 765-DWG 766-DWG 767-DWG 768-DWG 769-DWG 770-DWG 771-DWG 772-DWG 773-DWG 774-DWG 775-DWG 776-DWG 777-DWG 778-DWG 779-DWG 780-DWG 781-DWG 782-DWG 783-DWG 784-DWG 785-DWG 786-DWG 787-DWG 788-DWG 789-DWG 790-DWG 791-DWG 792-DWG 793-DWG 794-DWG 795-DWG 796-DWG 797-DWG 798-DWG 799-DWG 800-DWG 801-DWG 802-DWG 803-DWG 804-DWG 805-DWG 806-DWG 807-DWG 808-DWG 809-DWG 810-DWG 811-DWG 812-DWG 813-DWG 814-DWG 815-DWG 816-DWG 817-DWG 818-DWG 819-DWG 820-DWG 821-DWG 822-DWG 823-DWG 824-DWG 825-DWG 826-DWG 827-DWG 828-DWG 829-DWG 830-DWG 831-DWG 832-DWG 833-DWG 834-DWG 835-DWG 836-DWG 837-DWG 838-DWG 839-DWG 840-DWG 841-DWG 842-DWG 843-DWG 844-DWG 845-DWG 846-DWG 847-DWG 848-DWG 849-DWG 850-DWG 851-DWG 852-DWG 853-DWG 854-DWG 855-DWG 856-DWG 857-DWG 858-DWG 859-DWG 860-DWG 861-DWG 862-DWG 863-DWG 864-DWG 865-DWG 866-DWG 867-DWG 868-DWG 869-DWG 870-DWG 871-DWG 872-DWG 873-DWG 874-DWG 875-DWG 876-DWG 877-DWG 878-DWG 879-DWG 880-DWG 881-DWG 882-DWG 883-DWG 884-DWG 885-DWG 886-DWG 887-DWG 888-DWG 889-DWG 890-DWG 891-DWG 892-DWG 893-DWG 894-DWG 895-DWG 896-DWG 897-DWG 898-DWG 899-DWG 900-DWG 901-DWG 902-DWG 903-DWG 904-DWG 905-DWG 906-DWG 907-DWG 908-DWG 909-DWG 910-DWG 911-DWG 912-DWG 913-DWG 914-DWG 915-DWG 916-DWG 917-DWG 918-DWG 919-DWG 920-DWG 921-DWG 922-DWG 923-DWG 924-DWG 925-DWG 926-DWG 927-DWG 928-DWG 929-DWG 930-DWG 931-DWG 932-DWG 933-DWG 934-DWG 935-DWG 936-DWG 937-DWG 938-DWG 939-DWG 940-DWG 941-DWG 942-DWG 943-DWG 944-DWG 945-DWG 946-DWG 947-DWG 948-DWG 949-DWG 950-DWG 951-DWG 952-DWG 953-DWG 954-DWG 955-DWG 956-DWG 957-DWG 958-DWG 959-DWG 960-DWG 961-DWG 962-DWG 963-DWG 964-DWG 965-DWG 966-DWG 967-DWG 968-DWG 969-DWG 970-DWG 971-DWG 972-DWG 973-DWG 974-DWG 975-DWG 976-DWG 977-DWG 978-DWG 979-DWG 980-DWG 981-DWG 982-DWG 983-DWG 984-DWG 985-DWG 986-DWG 987-DWG 988-DWG 989-DWG 990-DWG 991-DWG 992-DWG 993-DWG 994-DWG 995-DWG 996-DWG 997-DWG 998-DWG 999-DWG 1000-DWG	DRG No.	PROJECT No.	DATE	09/06/10	B Diep
PROJECT											



Authorised Plate A	Tile edges do not form part of the sign
x-height (mm)	50 and 100
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 8
Colours:	See Appendix

- NOTES: 1. The legend is from the Transport Medium alphabet at the x-heights shown. The word 'local' on the bus is from the Transport Heavy alphabet.
2. Symbol details are given on drawings S 23, S 24 and S 25 sheets 1 & 2. The symbols must always face left.
3. The tile outlines do not form part of the sign.
4. COLOURS: —
Background ———— BLUE
Legend, Symbols & Border ——— WHITE
Legend on bus symbol ——— BLACK
5. DIMENSIONS : x-heights are in millimetres, other dimensions are in stroke widths. (4sw = x-height)
6. The legend 'local' may be omitted and the bus symbol varied to the one shown on drawing S 25 sheet 1. A time plate may be added in the same colours (see drawing P 961).

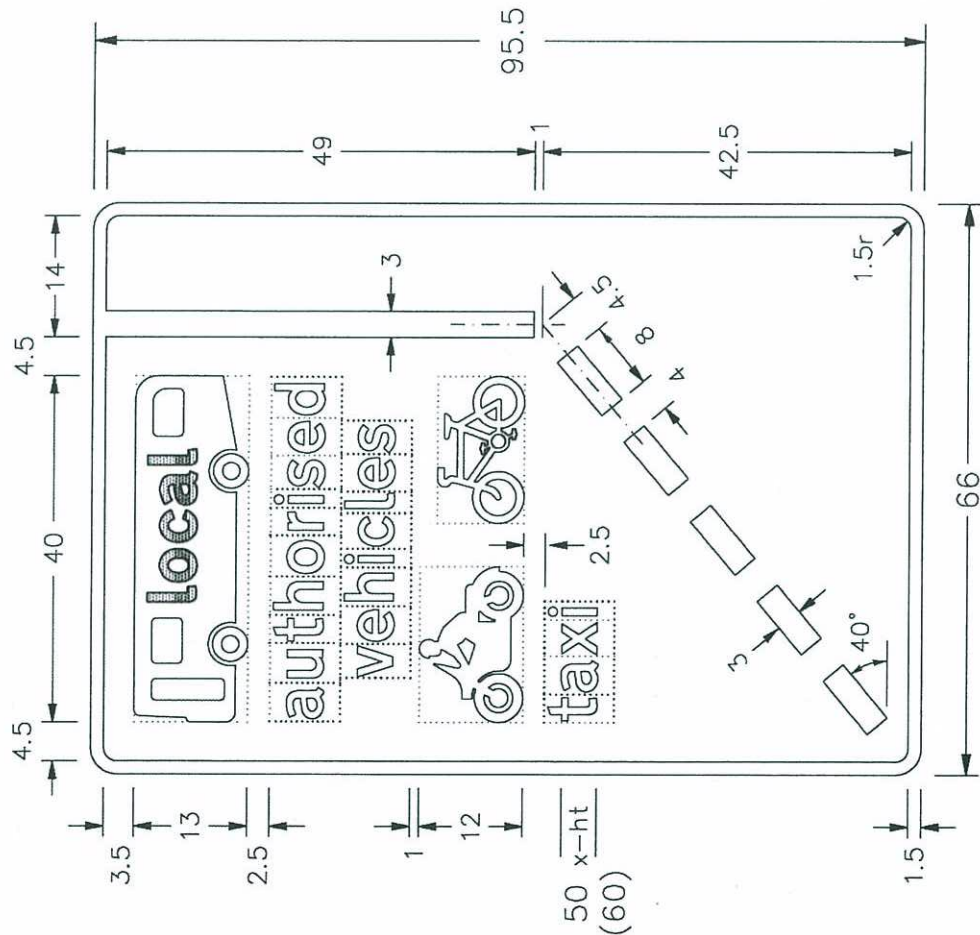

NP958x12

Before using this drawing, confirm that it has not been superseded.

<div> <div>Department for</div> <div>Transport</div> </div>	<div> <div>Title:</div> <div>BUS, AUTHORISED VEHICLES AND MOTOR CYCLE LANE AHEAD</div> </div>		<div> <div>Issue:</div> <div>Date: 12.8.05</div> <div>A: B: C:</div> </div>		<div> <div>Drawn by:</div> <div>L.W./R.M.</div> <div>Approved by:</div> <div>R.M.</div> </div>		<div> <div>Dimensions:</div> <div>SEE NOTE 5</div> </div>		<div> <div>Drawing No.</div> <div>NP 958.12</div> </div>	

Drawing No.	NP 959.10
Related Drawings	S 23, S 24, & S 25

NOTES: 1. The legend is from the Transport Medium alphabet at the x-heights shown. The word 'local' on the bus is from the Transport Heavy alphabet.

1. The legend is from the Transport Medium alphabet at the x-heights shown. The word 'local' on the bus is from the Transport Heavy alphabet.
2. Symbol details are given on drawings S 23, S 24 and S 25 sheets 1 & 2. The symbols must always face left.


3. The tile outlines do not form part of the sign.

4. COLOURS: —

Background	-----	BLUE
Legend, Symbols & Border	----	WHITE
Legend on bus symbol	-----	BLACK

5. DIMENSIONS : x-heights are in millimetres, other dimensions are in stroke widths. ($4sw = x\text{-height}$)

6. The legend 'local' may be omitted and the bus symbol varied to the one shown on drawing S 25 sheet 1. A time plate may be added in the same colours (see drawing P 961).

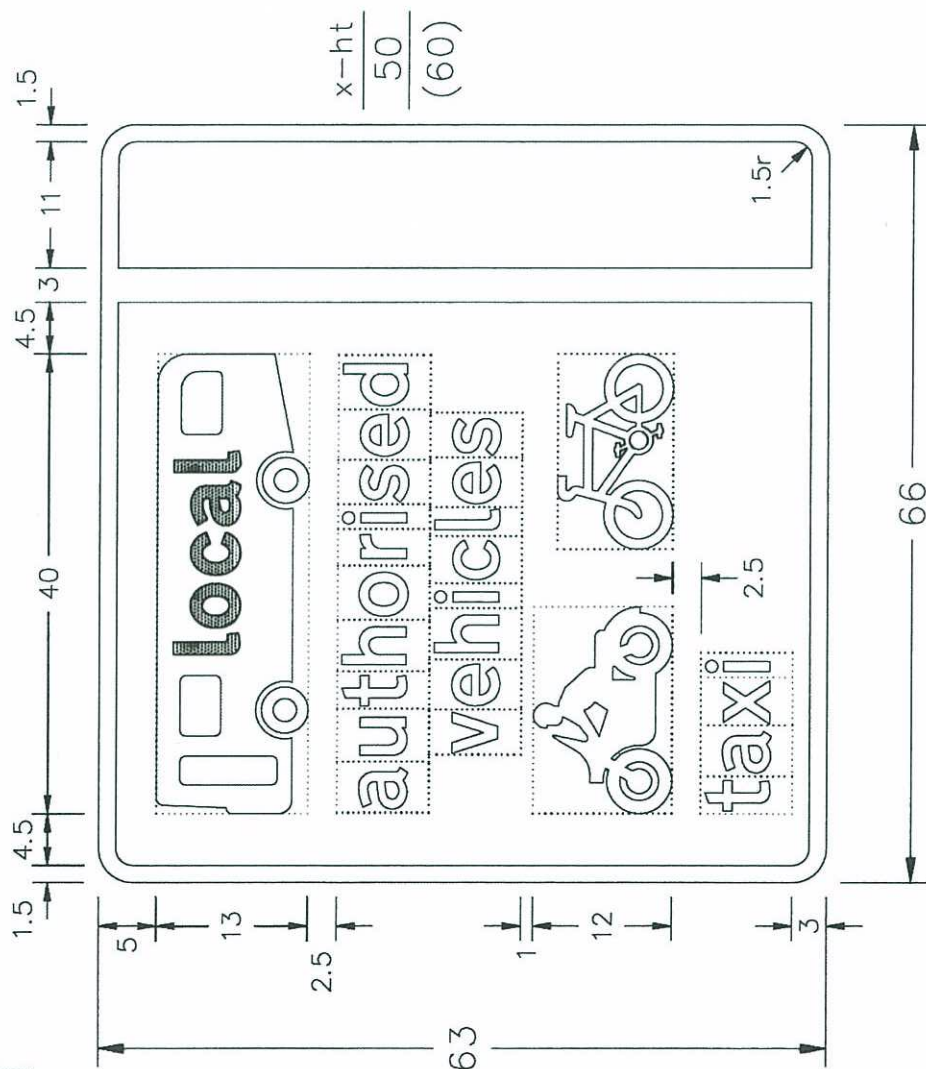

Before using this drawing, confirm that it has not been superseded.

Department for Transport	Title: BUS, AUTHORISED VEHICLES AND MOTOR CYCLE LANE	Regulatory Sign	Issue:	Date:	Drawn by:	Dimensions:	Drawing No.
			A:	12.8.05	L.W./R.M.	SEE	
			B:		Approved by:	NOTE 5	NP 959.10
			C:		R.M.		

Drawing No.	NP 958.13
Related Drawings	S 24, S 25

© CROWN COPYRIGHT

NOTES: 1. The legend is from the Transport Medium alphabet at the x-heights shown. The word 'local' on the bus is from the Transport Heavy alphabet.

2. Symbol details are given on drawings S 24 and S 25. The symbols must always face left.


3. The tile outlines do not form part of the sign.

4. COLOURS:—
Background ----- BLUE
Legend, Symbols & Border --- WHITE
Legend on bus symbol ----- BLACK

5. DIMENSIONS : x-heights are in millimetres, other dimensions are in stroke widths. (4sw = x-height)

6. The legend 'taxi' may be omitted. The legend 'local' may be omitted and the bus symbol varied to the one shown on drawing S 25 sheet 1.

7. A time plate may be added in the same colours (see drawing P 961).

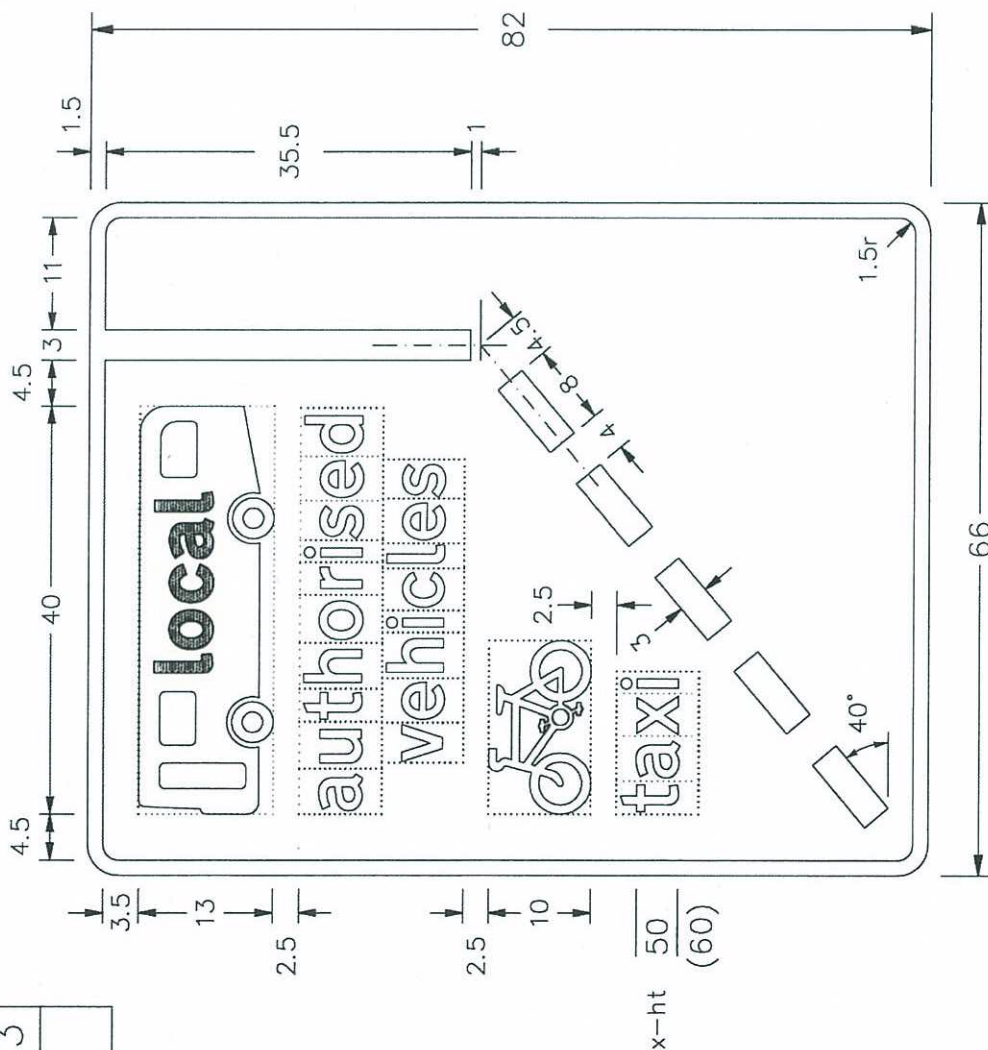


P958x13


Before using this drawing, confirm that it has not been superseded.

Department for Transport	Title: BUS and AUTHORISED VEHICLES LANE AHEAD	Issue: A: 16.2.06 B: C:	Date: 16.2.06	Drawn by: L.W. Approved by: R.M.	Dimensions: SEE NOTE 5	Drawing No. NP 958.13
------------------------------------	---	----------------------------------	------------------	---	------------------------------	--------------------------


- NOTES: 1. The legend is from the Transport Medium alphabet at the x-heights shown. The word 'local' on the bus is from the Transport Heavy alphabet.
2. Symbol details are given on drawings S 24 and S 25. The symbols must always face left.
3. The tile outlines do not form part of the sign.
4. COLOURS : Background ----- BLUE
Legend, Symbols & Border ---- WHITE
Legend on bus symbol ----- BLACK
5. DIMENSIONS : x-heights are in millimetres, other dimensions are in stroke widths. (4sw = x-height)
6. VARIANTS : The legend 'taxi' may be omitted. The legend 'local' may be omitted and the bus symbol replaced with the one shown on drawing S 25 sheet 1.
7. A time plate may be added in the same colours (see drawing P 961).

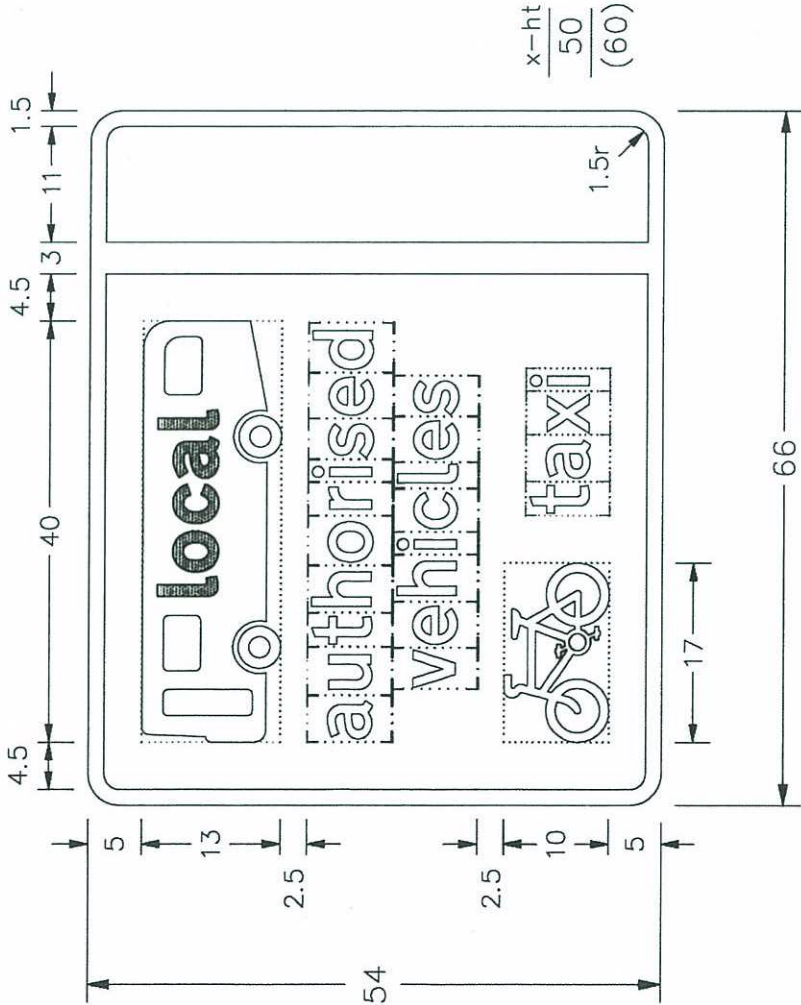


P959x11	<div> <div>Department for</div> <div>Transport</div> </div>	<div> <div>Title:</div> <div>BUS and AUTHORISED VEHICLES LANE</div> </div>	<div> <div>Regulatory Sign</div> </div>	<div> <div>Issue:</div> <div>A: 16.2.06</div> <div>B:</div> <div>C:</div> </div>	<div> <div>Date:</div> <div>16.2.06</div> </div>	<div> <div>Drawn by:</div> <div>L.W.</div> </div>	<div> <div>Dimensions:</div> <div>SEE NOTE 5</div> </div>	<div> <div>Drawing No.</div> <div>NP 959.11</div> </div>
				<div> <div>Approved by:</div> <div>R.M.</div> </div>		<div> <div>Before using this drawing, confirm that it has not been superseded.</div> </div>		

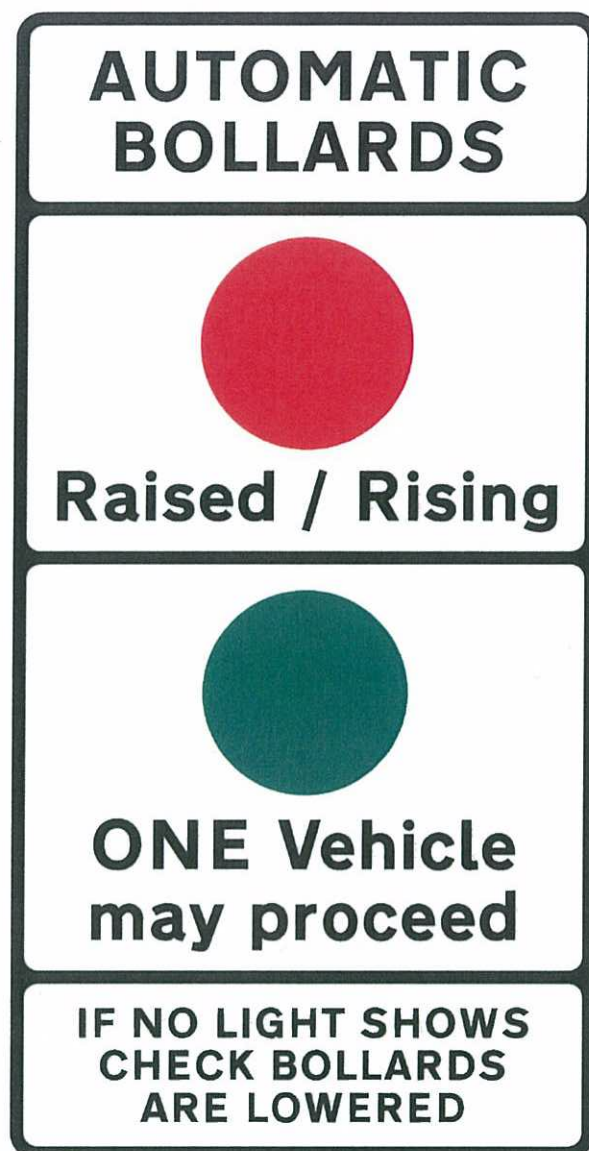

Authorised Sign N	Tile edges do not form part of the sign
x-height (mm)	37.5
Red / Green Aspect (mm)	100
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 9
Colours:	See Appendix

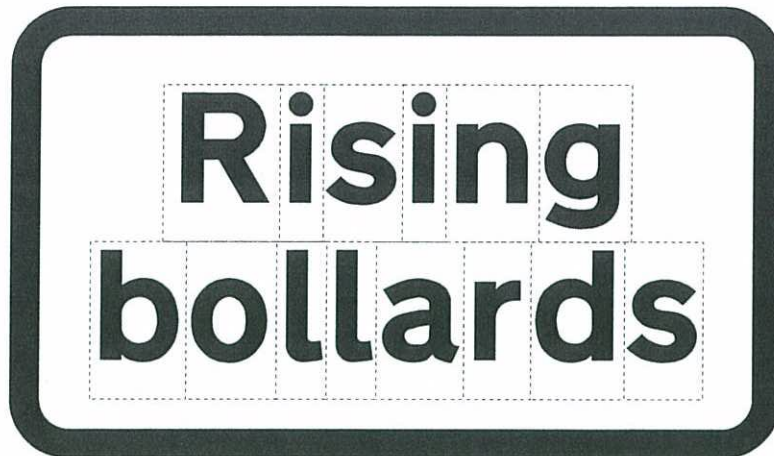

Authorised Plate B	Tile edges do not form part of the sign
x-height (mm)	62.5 min - 75 max
Illumination requirements	Traffic Signs Regulations and General Directions 2002, Schedule 17 item 8
Colours:	See Appendix

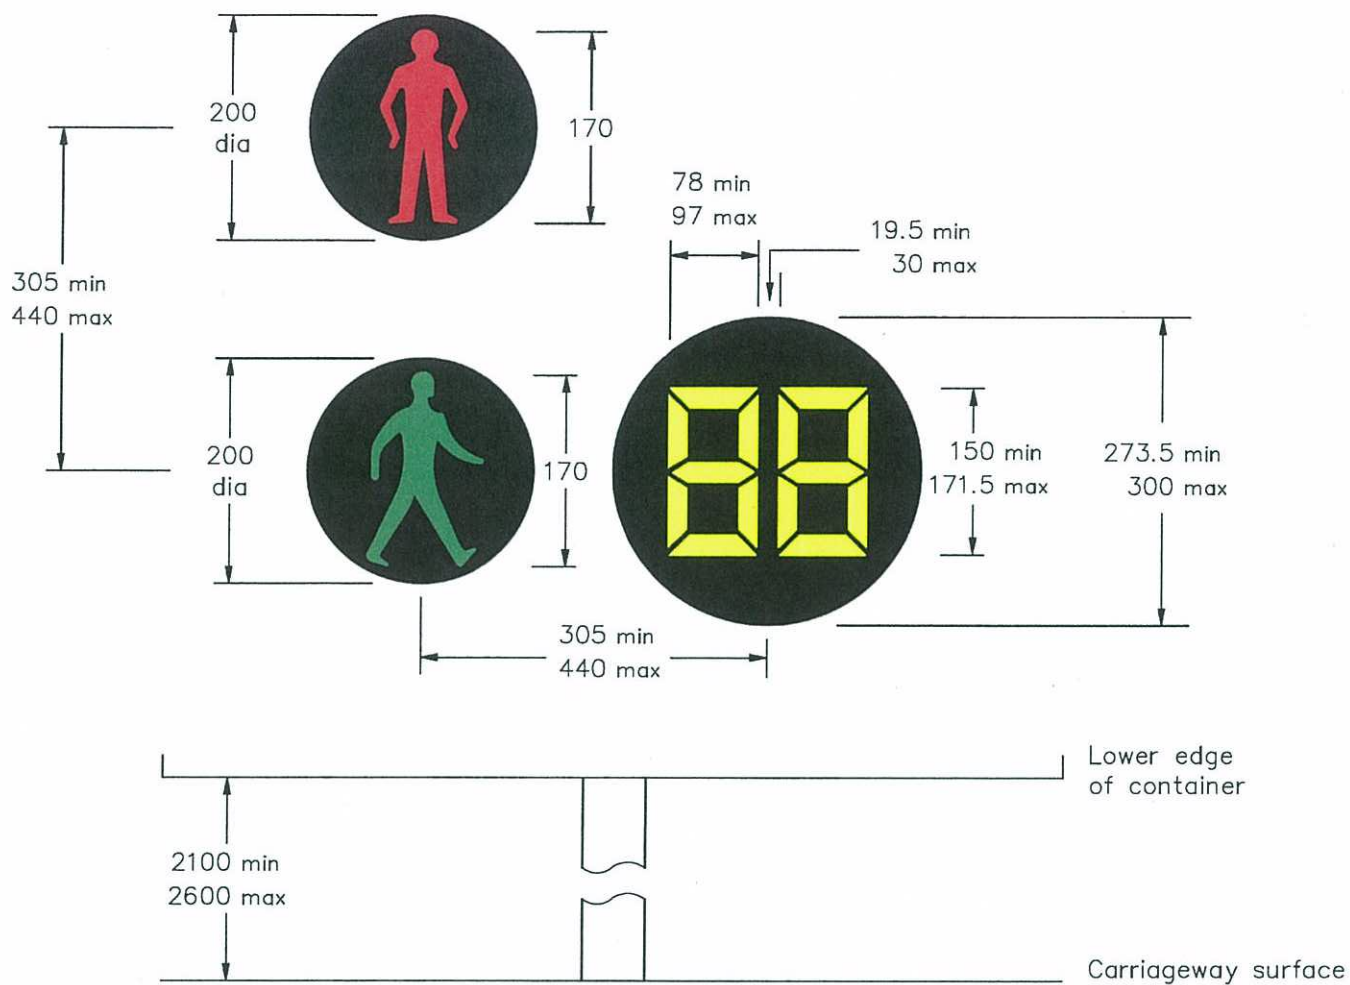

Authorised Light Signal	Dimensions do not form part of the sign
Performance requirements:	
Red/green figures	BS EN 12368: 2006
Countdown unit numerical display	BS EN 12966-1: 2005+A1: 2009

Standard Colours for Traffic Signs

The colours used for sign faces must conform to the chromaticity requirements specified in BS EN 12899-1. The National Annex recommends appropriate classes for UK use. As an aid to comparison, however, the table below lists the equivalent colours from BS 381C.

Colour (from BS EN 12899-1)	Equivalent colour (from BS 381C)
White	N/A
Yellow	No 355 (Lemon)
Red	No 537 (Signal Red)
Blue	No 109 (Middle Blue)
Green	No 225 (Light Brunswick Green)
Black	N/A

Standard Colours for Road Markings

The colours white and yellow are prescribed for road markings. Those markings associated with red routes require special authorisation and there are currently no plans to prescribe them.

The colours used for road markings must conform to the chromaticity requirements in BS EN 1436. For comparison, however, the equivalent colours from BS 381C are described below.

The standard colour for waiting and loading restriction road markings is No 355 (Lemon). No 309 (Canary) is also acceptable. However, in environmentally sensitive areas No 310 (Primrose) or No 353 (Deep Cream) may be used.